

MILLAC V II Series

MILLAC 468V II

MILLAC 561V II

MILLAC 611V II

MILLAC 761V II

MILLAC 852V II

MILLAC 1052V II



Vertical Machining Centers



MILLAC V II Series

Vertical Machining Centers

MILLAC 468V II / MILLAC 561V II / MILLAC 611V II
MILLAC 761V II / MILLAC 852V II / MILLAC 1052V II



MILLAC 611V II

Table size: 1,600 × 610 mm

OSP

FANUC

Integral motor/spindle Gear

No. 50 20 to 4,000 min⁻¹

<Standard Specifications : Spindle speed>



MILLAC 761V II

Table size: 1,800 × 720 mm

OSP

FANUC

Integral motor/spindle Gear

No. 50 20 to 4,000 min⁻¹

<Standard Specifications : Spindle speed>



MILLAC 852V II

Table size: 2,200 × 850 mm
3,200 × 850 mm

OSP

FANUC

Integral motor/spindle Gear

No. 50 20 to 4,000 min⁻¹

<Standard Specifications : Spindle speed>



MILLAC 1052V II

Table size: 2,200 × 1,050 mm
3,200 × 1,050 mm

OSP

FANUC

Integral motor/spindle Gear

No. 50 20 to 4,000 min⁻¹

<Standard Specifications : Spindle speed>



MILLAC 468V II

Table size: 1,050 × 460 mm

OSP

FANUC

Integral motor/spindle

No. 40 50 to 15,000 min⁻¹

No. 50 60 to 6,000 min⁻¹

<Standard Specifications : Spindle speed>



MILLAC 561V II

Table size: 1,350 × 560 mm

OSP

FANUC

Integral motor/spindle Gear

No. 50 30 to 6,000 min⁻¹

<Standard Specifications : Spindle speed>




MILLAC V II Series for heavy-duty cutting of medium-sized and large parts

Highly rigid slide guideway structure for powerful cutting and reduced cycle time

Thermo-Friendly Concept enables improved productivity with high dimensional stability

Photos shown in this brochure may include optional equipment.

Diverse lineup to meet all kinds of needs

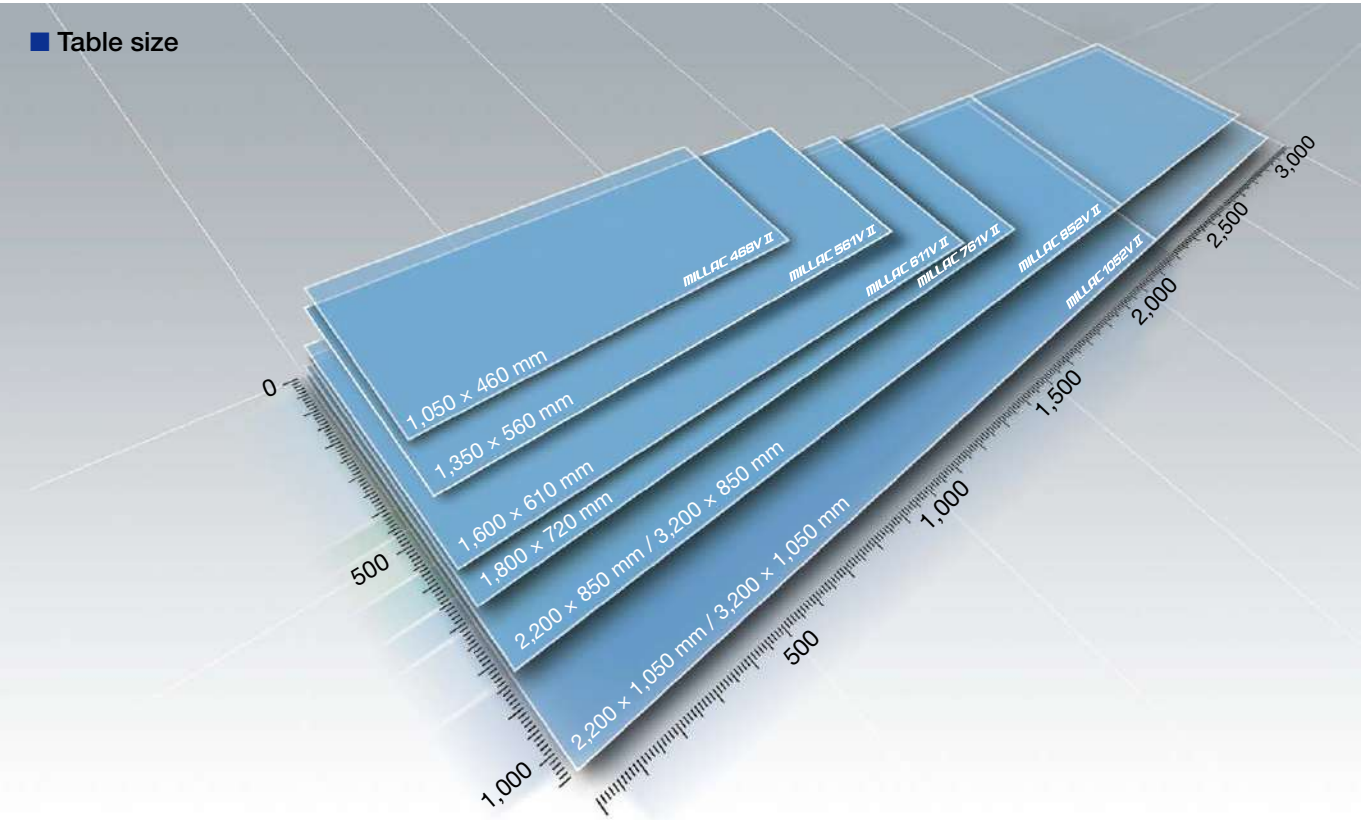

■ Spindle specifications

Standard Specifications

OSP Specifications			MILLAC 468V II	MILLAC 561V II	MILLAC 611V II	MILLAC 761V II	MILLAC 852V II	MILLAC 1052V II
No. 40	Integral motor/spindle	Spindle speed [min ⁻¹]	50 to 15,000	80 to 12,000	50 to 15,000			
		Motor output	26/18.5 kW	22/18.5 kW	26/18.5 kW			
No. 50	Integral motor/spindle	Spindle speed [min ⁻¹]	60 to 6,000	60 to 10,000	50 to 12,000			
		Motor output	18.5/11 kW	22/18.5 kW	26/18.5 kW			
	Gear	Spindle speed [min ⁻¹]	—	—	20 to 4,000	20 to 4,000	20 to 4,000	20 to 4,000
		Motor output	—	—	15/11 kW	18.5/15 kW	22/18.5 kW	22/18.5 kW
		Spindle speed [min ⁻¹]	—	30 to 6,000	30 to 6,000	30 to 6,000	30 to 6,000	30 to 6,000
		Motor output	—	15/11 kW	15/11 kW	18.5/15 kW	22/18.5 kW	22/18.5 kW


FANUC Specifications			MILLAC 468V II	MILLAC 561V II	MILLAC 611V II	MILLAC 761V II	MILLAC 852V II	MILLAC 1052V II
No. 40	Integral motor/spindle	Spindle speed [min ⁻¹]	50 to 15,000	80 to 12,000	50 to 15,000			
		Motor output	22/18.5 kW	22/18.5 kW	22/18.5 kW			
No. 50	Integral motor/spindle	Spindle speed [min ⁻¹]	60 to 6,000	60 to 10,000	50 to 12,000			
		Motor output	18.5/11 kW	22/18.5 kW	22/18.5 kW			
	Gear	Spindle speed [min ⁻¹]	—	—	20 to 4,000	20 to 4,000	20 to 4,000	20 to 4,000
		Motor output	—	—	15/11 kW	18.5/15 kW	22/18.5 kW	22/18.5 kW
		Spindle speed [min ⁻¹]	—	30 to 6,000	30 to 6,000	30 to 6,000	30 to 6,000	30 to 6,000
		Motor output	—	15/11 kW	15/11 kW	18.5/15 kW	22/18.5 kW	22/18.5 kW

Reliable, highly rigid construction allows for high-speed, heavy-duty cutting

Highly rigid construction

■ Bed column

Strong base column construction has optimally-placed ribs to counter chatter and twisting during heavy-duty cutting. Traditional box ways is used for all axes to give high accuracy and rigidity over the long term.

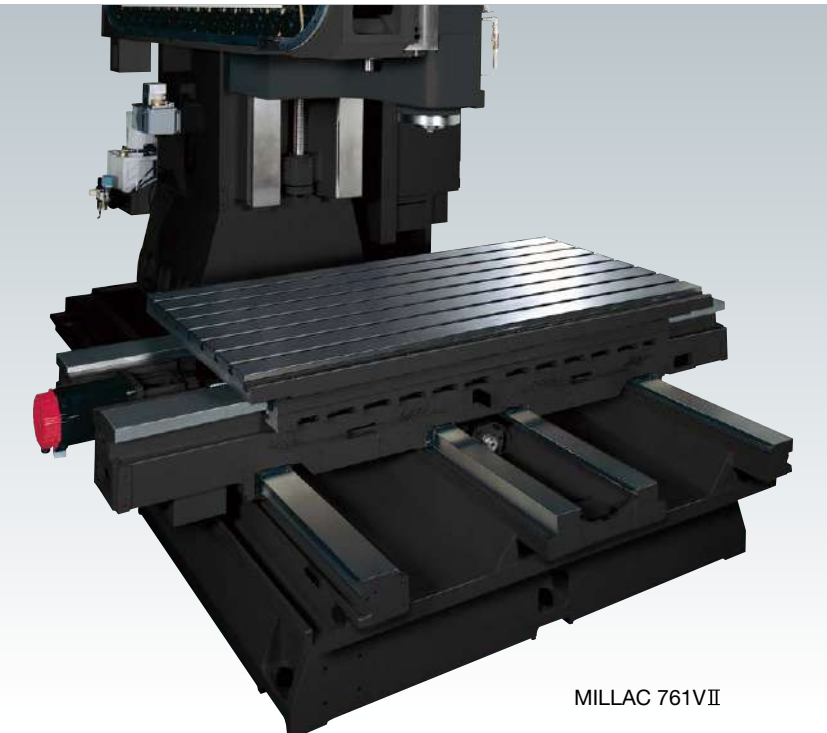

MILLAC 761V II

■ Machining Capacity

360 cm³/min

No. 50 6,000 min⁻¹ 18.5 kW Integral motor/spindle
MILLAC 468V II

588 cm³/min

No. 50 10,000 min⁻¹ 22 kW Integral motor/spindle
MILLAC 561V II

540 cm³/min

No. 50 4,000 min⁻¹ 18.5 kW 2-speed gear head spindle
MILLAC 761V II, MILLAC 852V II

756 cm³/min

No. 50 4,000 min⁻¹ 22 kW 2-speed gear head spindle
MILLAC 1052V II



Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Okuma Intelligent Technology for competitive machine shops



Thermo-Friendly Concept

The innovation that accepts temperature changes

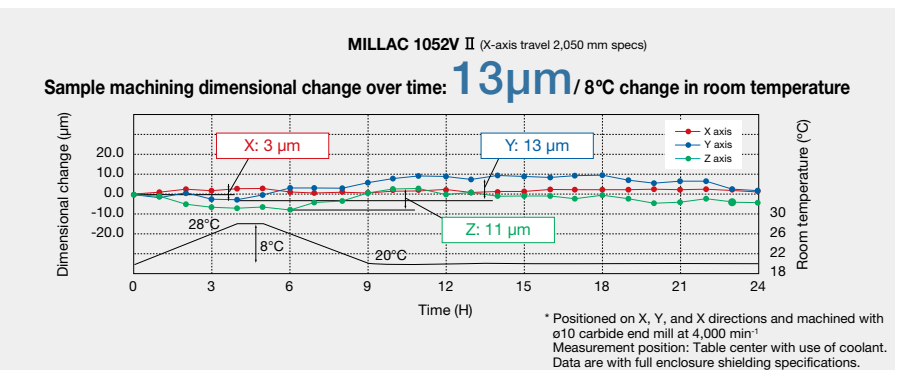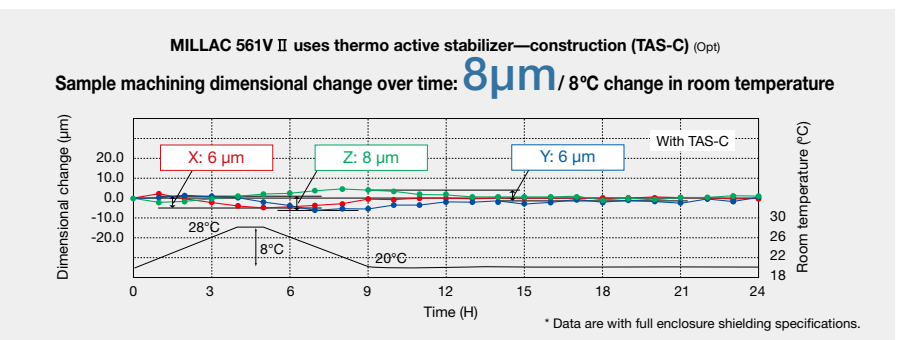

* The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Thermo-Friendly structure gives outstanding dimensional stability

TAS-C: Thermo Active Stabilizer—Construction
“Proactively” keeps the machine [construction] in optimum, stable condition during shop environment temperature change—resulting in superb (stable) machining accuracies.


*Optional on MILLAC 468V II/561V II.
Standard on MILLAC 611V II/761V II/852V II/1052V II
(OSP-P300MA only)

TAS-S: Thermo Active Stabilizer—Spindle
Spindle deformation will be accurately controlled even during operations with frequent speed changes.

Eliminate waste with the Thermo-Friendly Concept

In addition to maintaining high dimensional accuracy when room temperature changes, Okuma’s Thermo-Friendly Concept provides high dimensional accuracy during machine startup and machining restart.

To stabilize thermal deformation, warming-up time is shortened and the burden of dimensional correction during machining restart is reduced.

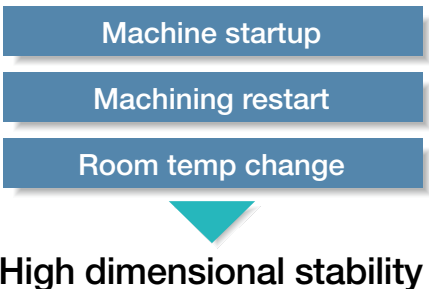


Machining Navi M-i, M-gII+, M-gII* (Optional: OSP-P300MA only)

* Harmonic Spindle Speed Control available only with M-i or M-gII+. (N/A with M-g II.)

Automatically changes to optimum spindle speed (M-i)


Built-in sensors measure chatter vibration and the machine automatically changes to the best spindle speed.
● Available only with Okuma integral motor/spindles. (N/A with gear spindles.)

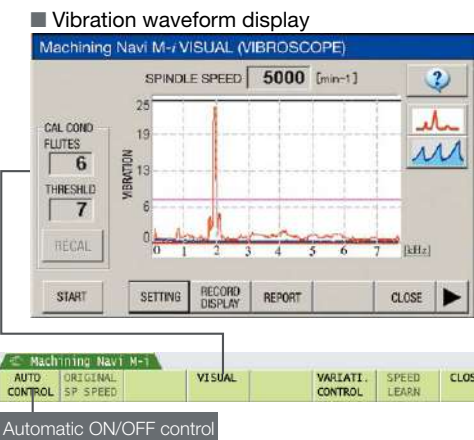

Adjust cutting conditions while monitoring the data (M-gII+, M-gII)

Navigates effective measures by detecting and analyzing machining chatter with a microphone attached to the machine.

- M-gII+ : compatible with integral spindles
- M-gII : compatible with gear spindles

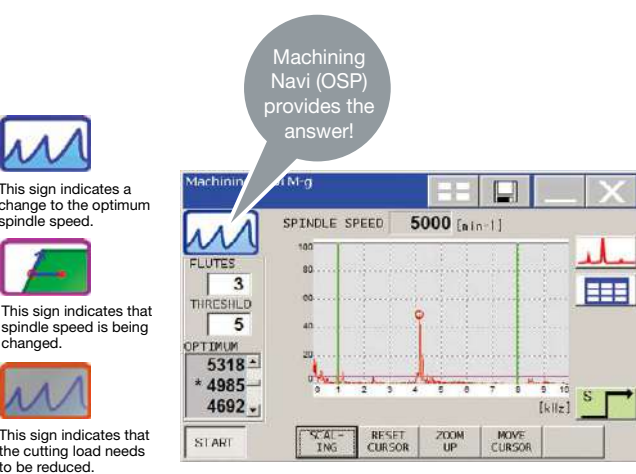

SERVO NAVI (OSP-P300MA only)

Optimized Servo Control


Achieves long term accuracy and surface quality

SERVO NAVI AI (Automatic Identification)

- Cycle time shortened with faster acceleration
- Work Weight Auto Setting

On table travel type machining centers, the table feed acceleration with the previous system was the same regardless of weight, such as workpieces and fixtures loaded on the table.

Work Weight Auto Setting estimates the weight of the workpiece and fixture on the table and automatically sets the linear axis servo parameters, including acceleration, to the optimum values. Cycle times are shortened with no changes to machining accuracy.

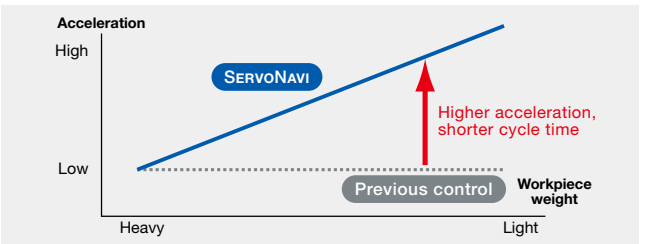

SERVO NAVI SF (Surface Fine-tuning)

- Maintains machining accuracy and surface quality
- Reversal Spike Auto Adjustment


Slide resistance changes with length of time machine tools are utilized, and discrepancies occur with the servo parameters that were the best when the machine was first installed. This may produce crease marks at motion reversals and affect machining accuracy (part surface quality).

SERVO NAVI’s Reversal Spike Auto Adjustment maintains machining accuracy by switching servo parameters to the optimum values matched to changes in slide resistance.

- Contributes to longer machine life
- Vibration Auto Adjustment

When aging changes machine performance, noise, vibration, crease marks, or fish scales may appear.

Vibration Auto Adjustment can quickly eliminate noise and vibration even from machines with years of operation.



Collision Avoidance System

Collision prevention
(Optional: OSP-P300M only)

World’s first “Collision-Free Machine”

CAS prevents collisions in automatic or manual mode, providing risk-free protection for the machine and great confidence for the operator.

ECO suite (OSP-P300MA only)

Next-Generation Energy-Saving System

A suite of energy saving applications for machine tools

ECO Idling Stop Accuracy ensured, cooler off
Intelligent energy-saving function with the Thermo-Friendly Concept. The machine itself determines whether or not cooling is needed and cooler idling is stopped with no loss to accuracy.

Electricity consumption during non-machining time greatly reduced with “ECO Idling Stop”, which shuts down each piece of auxiliary equipment not in use. (Standard application on machines with Thermo-Active Stabilizer—Spindle)


ECO Power Monitor On-the-spot check of energy savings
Power is shown individually for spindle, feed axes, and auxiliaries on the OSP operation screen. The energy-saving benefits from auxiliary equipment stopped with ECO Idling Stop can be confirmed on the spot.

ECO Operation (Optional)

Intermittent/continuous operation of chip conveyor and mist collector during operation

MILLAC 468V II

Vertical Machining Center



Machine Specifications


Photos shown in this brochure may also show optional equipment.

Item		Unit	MILLAC 468V II	
			No. 50 6,000 min ⁻¹	No. 40 15,000 min ⁻¹
Travels	X axis (table R/L)	mm (in)	820 (32.28)	
	Y axis (table F/B)	mm (in)	460 (18.11)	
	Z axis (spindle U/D)	mm (in)	450 (17.72)	
	Table top to spindle nose	mm (in)	150 to 600 (5.91 to 23.62)	
	Column to spindle center	mm (in)	510 (20.08)	
Table	Work surface	mm (in)	1,050 × 460 (41.34 × 18.11)	
	Floor to table top	mm (in)	930 (36.61)	
	Max load capacity	kg (lb)	500 (1,100)	
Spindle	Spindle speed	min ⁻¹	60 to 6,000	50 to 15,000
	Speed ranges		Stepless (integral motor/spindle)	
	Tapered bore		7/24 taper No. 50	7/24 taper No. 40
	Bearing dia	mm (in)	ø90 (3.54)	ø70 (2.76)
Feedrate	Rapid traverse	m/min (fpm)	X-Y: 32, Z: 24 (X-Y: 105, Z: 79)	
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 15,000 (591)	
Motors	Spindle	kW (hp)	OSP 18.5/11 (25/15) (15%ED/cont)	OSP 26/18.5 (35/25) (10 min/cont)
			FANUC 18.5/11 (25/15) (40%ED/cont)	FANUC 22/18.5 (30/25) (15 min/cont)
ATC	Tool storage	tool	20 [30]	
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø150 (ø4.72/ø5.91)	
	Max tool length	mm (in)	350 (13.78)	
	Max tool mass	kg (lb)	20 (44)	10 (22)
Machine size	Height	mm (in)	2,790 (109.84)	
	Floor space	mm (in)	OSP: 2,265 × 2,995 (89.17 × 117.91), FANUC: 2,200 × 2,995 (86.61 × 117.91)	
	Mass	kg (lb)	6,700 (14,740)	
Control			OSP-P300MA, FANUC 31i-B	


[]: Optional

Spindle torque/output graphs


No. 50 6,000 min⁻¹ spindle (OSP)
Maximum output: 18.5/11 kW (15%ED/cont)
Maximum torque: 326/175 N-m (15%ED/cont)

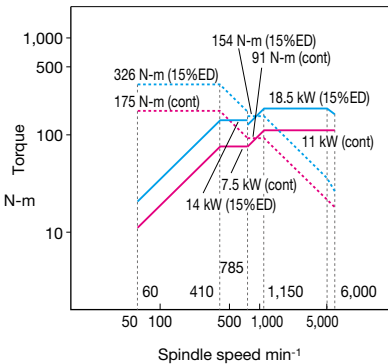

No. 50 6,000 min⁻¹ spindle (FANUC)
Maximum output: 18.5/11 kW (40%ED/cont)
Maximum torque: 326/175 N-m (15%ED/cont)

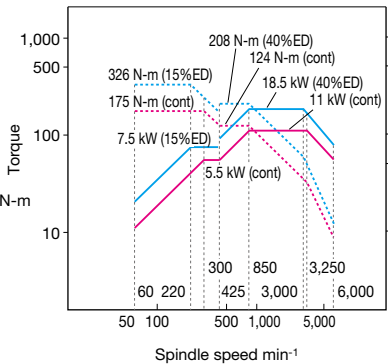

No. 40 15,000 min⁻¹ spindle (OSP)
Maximum output: 26/18.5 kW (10 min/cont)
Maximum torque: 199/146 N-m (5 min/cont)

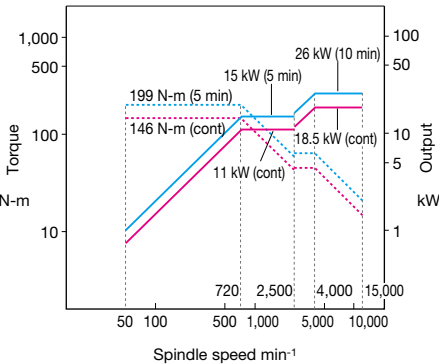


Dimensional drawing/Installation drawing

Unit: mm (in)

No. 50 6,000 min⁻¹ specs
OSP-P300MA specs
[] are FANUC specs

Air inlet: Rc 3/8, height from floor: 1,315
Required flow rate: 250 L/min (ANR) 0.5 MPa
(when chip air blower is used: 450 L/min (ANR))

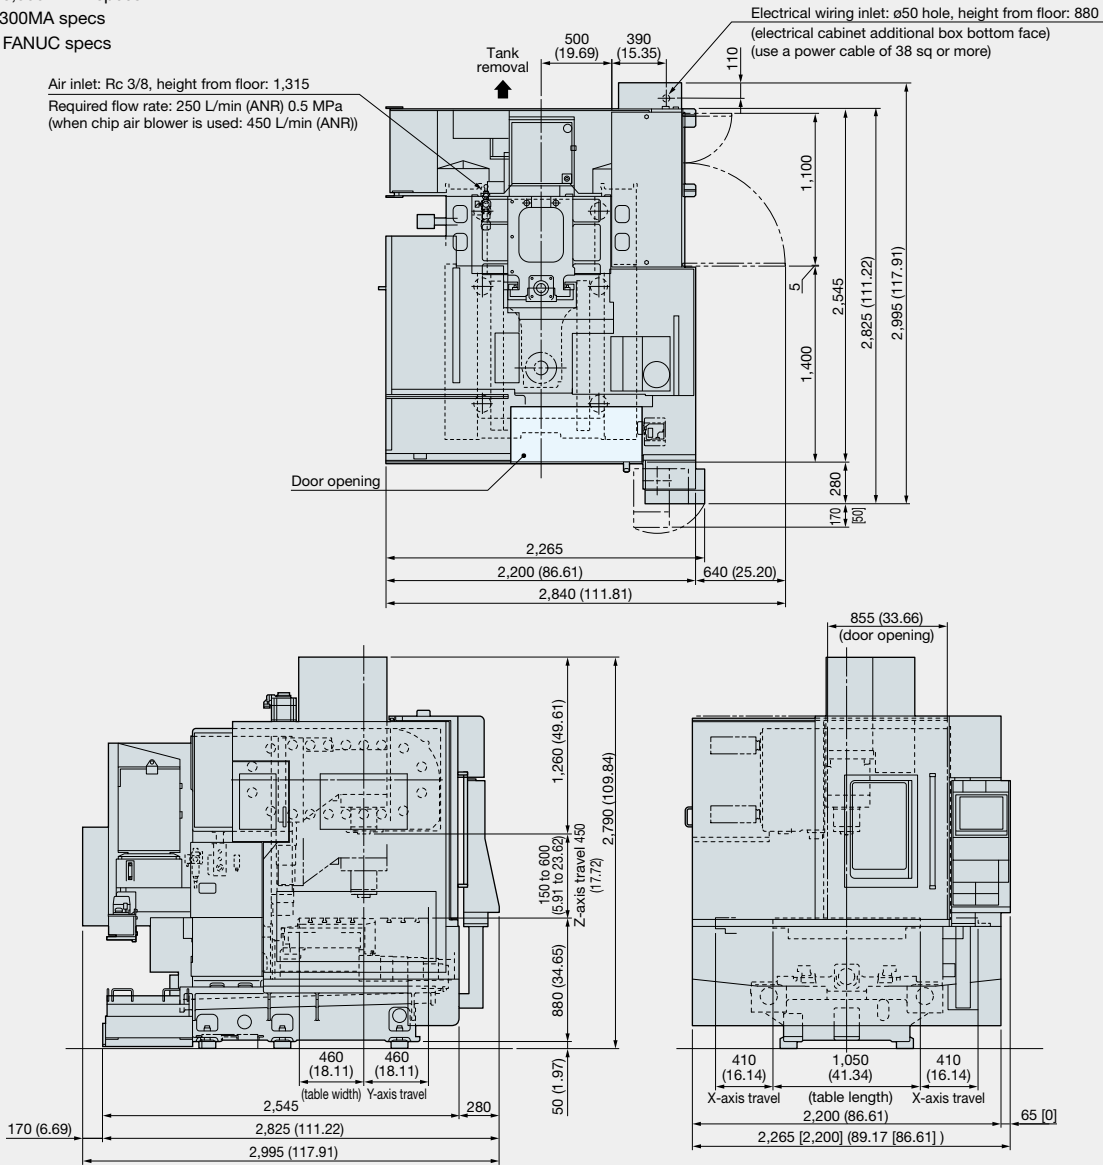

These drawings may differ depending on the destination country or region.

Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm³/min) (in³/min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 Spindle 6,000 min ⁻¹ integral motor	ø125 face mill 8 blades	360 (21.96)	148 (485.59)	5 (0.20)	90 (3.54)	800 (31.50)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Standard Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	In-machine conveyor	Gutter: Coil type (1 each left and right)
	FANUC 31i-B	Chip pan	
Spindle speed	60 to 6,000 min ⁻¹ No. 50 Integral motor	Coolant supply system	Tank: 200 L, Pump motor: 180 W
	Spindle motor 18.5/11 kW	Coolant nozzle	3 flexible nozzles
	50 to 15,000 min ⁻¹ No. 40 Integral motor	Work lamp	LED
	Spindle motor 26/18.5 kW (OSP)	Spindle air curtain	
	22/18.5 kW (FANUC)	Air cleaner (filter)	Including regulator
Spindle nose constraint	BIG-PLUS® (No. 50)	Door interlock	
Spindle cooling system	Oil controller	Pulse handle	Single axis, switchable
ATC magazine	20 tools	Electronic buzzer	At operation end and alarm times
ATC air blower		Foundation blocks / Jack bolts	
Full-enclosure	With ceiling	Tool / Tool box	Hand tools
Slideway lubricating equipemnt		Tool release lever	

Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
ATC magazine	30 tools (both No. 40, No. 50)	Reference tool	
Chip air blower	Nozzle type	Ring gauge	
Coolant pump	Pump motor 370 W	High column	+ 200 mm, including full enclosure shielding for high columns
Coolant nozzle	Ring type		
Semi-dry unit	Nozzle type, Thru-spindle type	Auto gauging, auto zero offset	Infrared communication type
Coolant level sensor		Auto tool lengh compensation/auto tool breakage detection function	Touch type
Coolant temperature regulator			
Oil hole device	0.5 MPa, 1.5 MPa	Pulse handle	3-axis round handle, 3-axis round handle + 1-axis mobile type switch
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.		
Spindle nose constraint	BIG-PLUS® (No. 40)	TAS-S: Thermo Active dimension Stabilizer – Spindle (OSP)	
In-machine chip discharge	Oil pan: chip flusher type	TAS-C: Thermo Active dimension Stabilizer – Construction (OSP)	
Off-machine chip discharge	Hinge conveyor, scraper conveyor See recommended chip conveyor specifications, P31.	Spindle thermal deformation compensation (FANUC)	
Chip bucket	Tilt with/without	Ambient thermal deformation compensation (FANUC)	
Raised machine	20 mm	AbsoScale detection (OSP)	X-Y-Z axis
Workpiece washing gun		Scale feedback (FANUC)	X-Y-Z axis
Air gun mount		Status indicator	
Angle head preps		Foundation bolt	
Manual clamp fixture		Rotary 2-pallet APC	Forms set together with below options. High column 200 mm Pallet size 820 × 460 mm Tap pallet, T-slot pallet Full enclosure shielding for 2-pallet rotary-shuttle APC
Hydraulic and pneumatic fixtures			
Oil skimmer	Belt type		
Mist collector			
Auto open/close front cover			
Rotary table	NC, tilt, indexing		
Sub table	1,050 × 460 × 70 mm		

Maximum tool dimensions

Unit: mm (in)


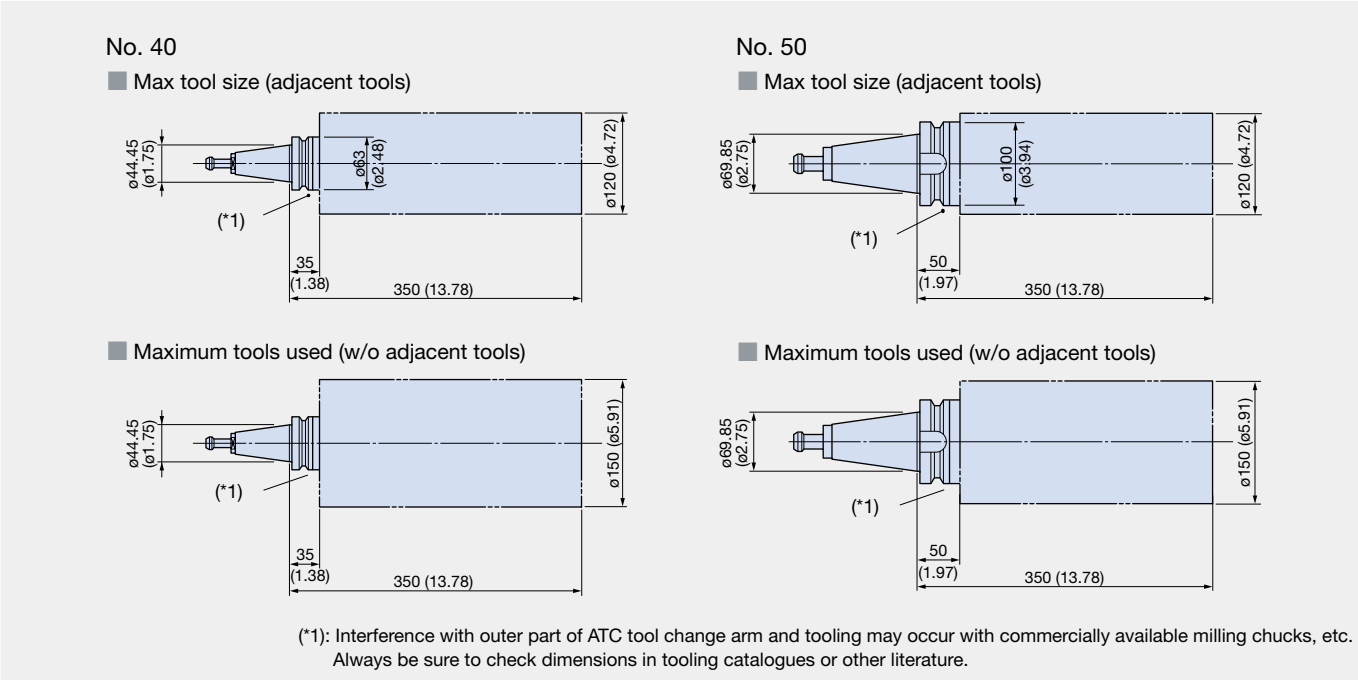



Table size

Unit: mm (in)

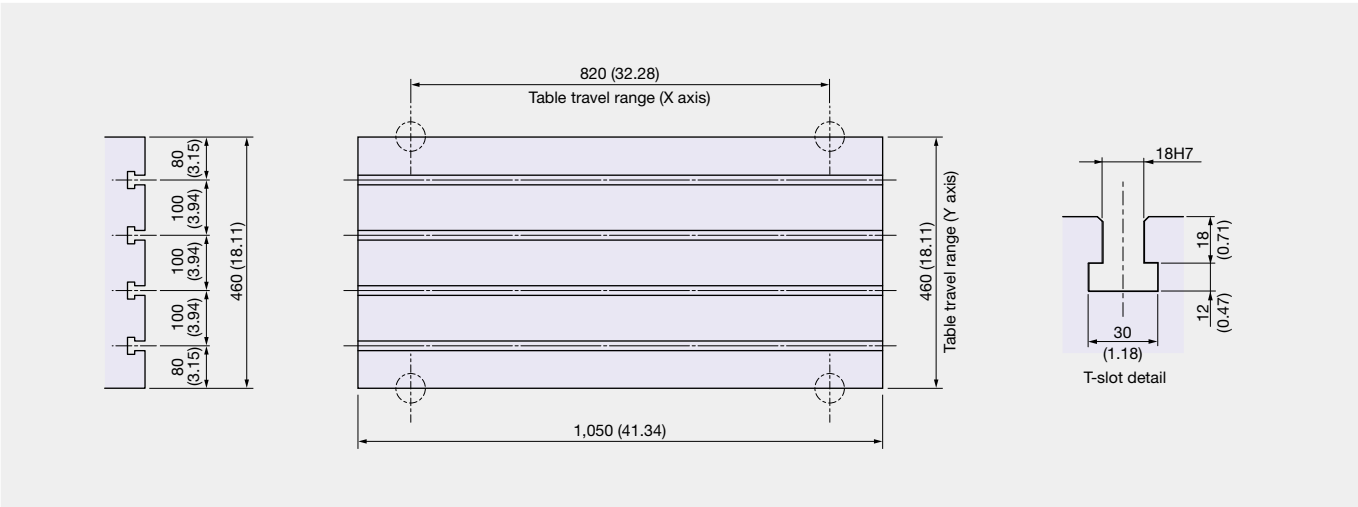


Working range

Unit: mm (in)

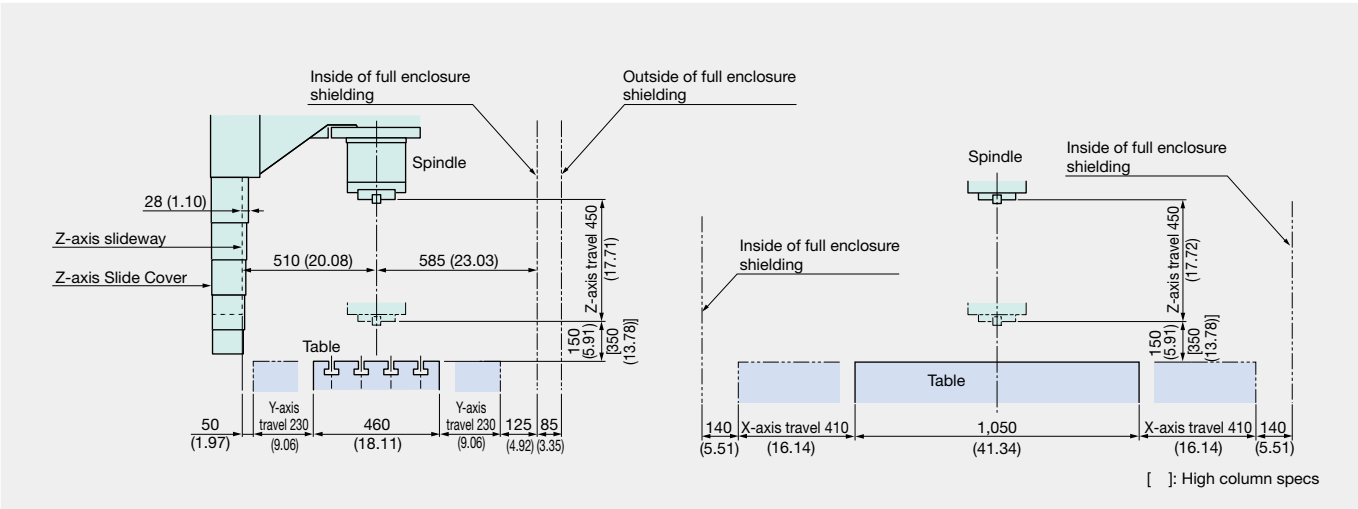

MILLAC 561V II

Vertical Machining Center



Machine Specifications


Photos shown in this brochure may also show optional equipment.

Item		Unit	MILLAC 561V II		
			No. 50 6,000 min ⁻¹	No. 50 10,000 min ⁻¹	No. 40 12,000 min ⁻¹
Travels	X axis (table R/L)	mm (in)	1,050 (41.34)		
	Y axis (table F/B)	mm (in)	560 (22.05)		
	Z axis (spindle U/D)	mm (in)	520 (20.47)		
	Table top to spindle nose	mm (in)	170 to 690 (6.69 to 27.17)		
	Column to spindle center	mm (in)	590 (23.23)		
Table	Work surface	mm (in)	1,350 × 560 (53.15 × 22.05)		
	Floor to table top	mm (in)	950 (37.40)		
	Max load capacity	kg (lb)	1,000 (2,200)		
Spindle	Spindle speed	min ⁻¹	30 to 6,000	60 to 10,000	80 to 12,000
	Speed ranges		2-speed	Stepless (integral motor/spindle)	
	Tapered bore		7/24 taper No. 50		7/24 taper No. 40
	Bearing dia	mm (in)	ø100 (3.94)		ø70 (2.76)
Feedrate	Rapid traverse	m/min (fpm)	X-Y: 32, Z: 24 (X-Y: 105, Z: 79)		
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 15,000 (591)		
Motors	Spindle	kW (hp)	15/11 (20/15) (30 min/cont)	22/18.5 (30/25) (15 min/cont)	
ATC	Tool storage	tool	20 [30, 40]		20 [40]
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø150 (ø4.72/ø5.91)		ø90/ø115 (ø3.54/ø4.53)
	Max tool length	mm (in)	350 (13.78)		300 (11.81)
	Max tool mass	kg (lb)	20 (44)		8 (17.6)
Machine size	Height	mm (in)	2,755 (108.46)	2,930 (115.35)	2,825 (111.22)
	Floor space	mm (in)	2,650 × 3,395 (104.33 × 133.66)		
	Mass	kg (lb)	9,100 (20,020)		
Control			OSP-P300MA, FANUC 31i-B		


[]: Optional

Spindle torque/output graphs


No. 50 6,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 15/11 kW (30 min/cont)
Maximum torque: 376/276 N-m (30 min/cont)

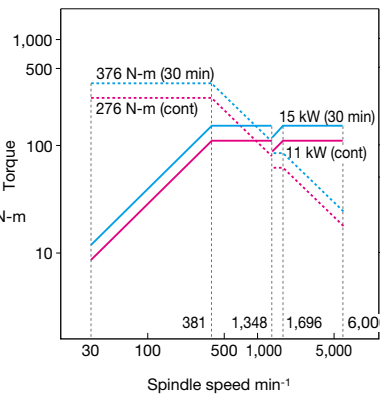

No. 50 10,000 min⁻¹ spindle (OSP)
Maximum output: 23.7/18.5 kW (3 min/cont)
Maximum torque: 205/125 N-m (3 min/cont)

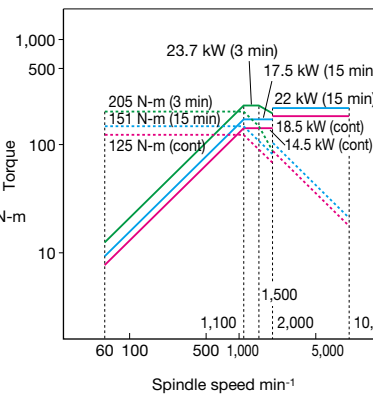



No. 50 10,000 min⁻¹ spindle (FANUC)
Maximum output: 22/18.5 kW (15 min/cont)
Maximum torque: 204/119 N-m (25%ED/cont)

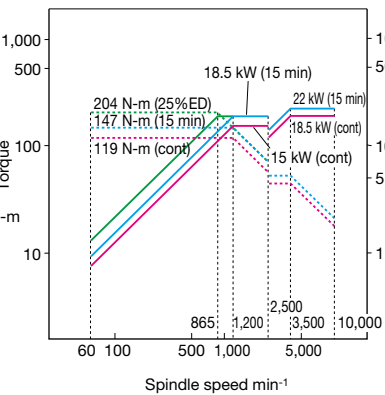

Dimensional drawing/Installation drawing

Unit: mm (in)

No. 50 6,000 min⁻¹ specs
OSP-P300MA specs

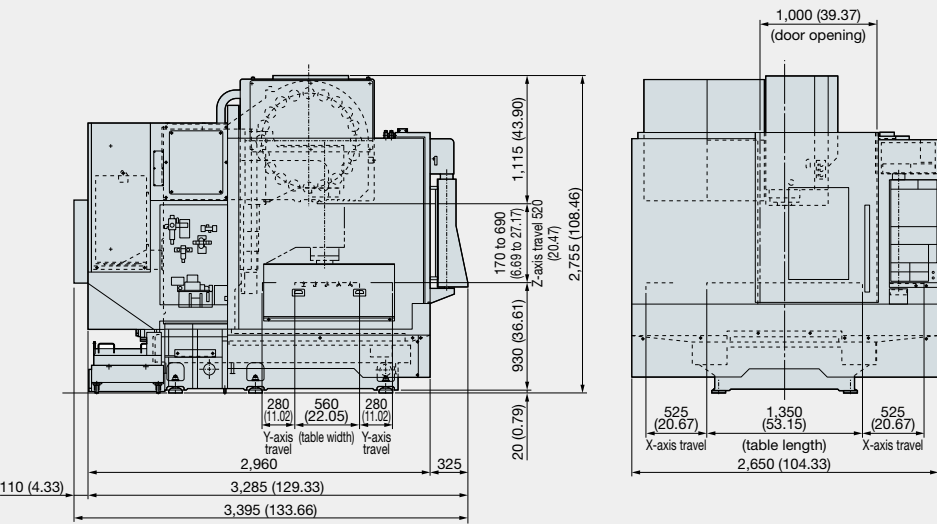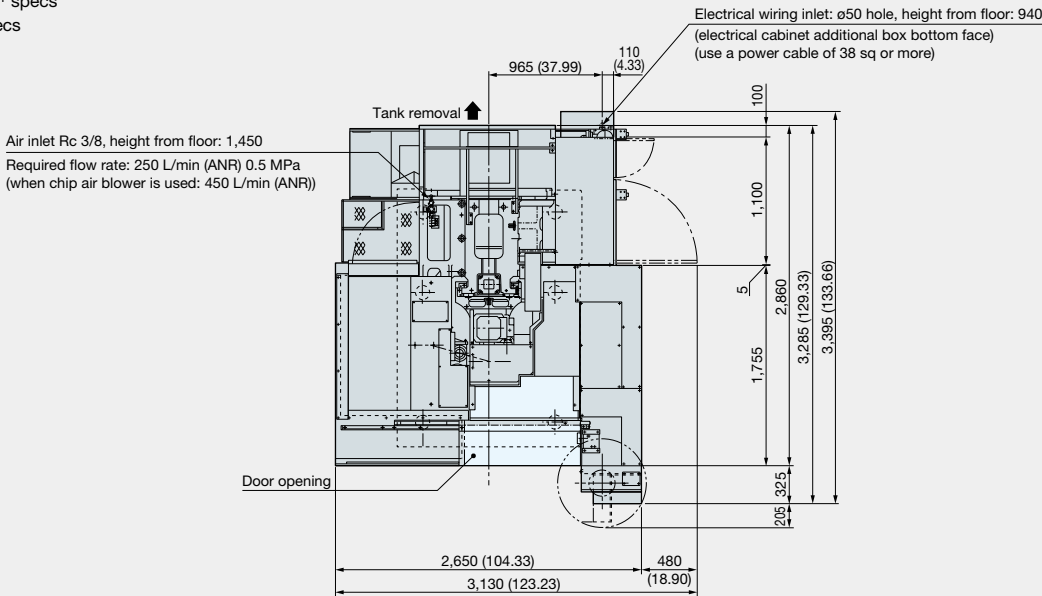

These drawings may differ depending on the destination country or region.

Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm³/min) (in³/min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 spindle 6,000 min ⁻¹ 2-speed gear head	ø125 face mill, 6 blades	252 (15.37)	120 (393.72)	7 (0.28)	90 (3.54)	400 (15.75)
No. 50 Spindle 10,000 min ⁻¹ integral motor (optional)	ø80 face mill, 6 blades	588 (35.87)	250 (820.25)	5 (0.20)	56 (2.20)	2,100 (82.68)
No. 40 Spindle 12,000 min ⁻¹ integral motor (optional)	ø100 face mill, 5 blades	350 (21.35)	170 (557.77)	5 (0.20)	70 (2.76)	1,000 (39.37)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Standard Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	Chip pan	
	FANUC 31i-B	Coolant supply system	Tank: 220 L, Pump motor: 180 W
Spindle speed	6,000 min ⁻¹ No. 50 2-speed gear head spindle Spindle motor 15/11 kW	Coolant nozzle	3 flexible nozzles
		Work lamp	LED
		Spindle air curtain	
Spindle nose constraint	BIG-PLUS®	Air cleaner (filter)	Including regulator
Spindle cooling system	Oil controller	Door interlock	
ATC magazine	20 tools	Pulse handle	Single axis, switchable
ATC air blower		Electronic buzzer	At operation end and alarm times
Full-enclosure	With ceiling	Foundation blocks / Jack bolts	
Slideway lubricating equipemnt		Tool / Tool box	Hand tools
In-machine conveyor	Gutter: Coil type (1 each left and right)*1	Tool release lever	

*1: “Required” optional specs

Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
Spindle speed 10,000 min ⁻¹	No. 50 integral motor/spindle 22/18.5 kW	Auto open/close front cover	
Spindle speed 12,000 min ⁻¹	No. 40 integral motor/spindle 22/18.5 kW	Rotary table	NC, tilt, indexing
ATC magazine	40 tools; 30 tools possible with No. 50 spindle only	Sub table	1,350 × 560 × 90 mm
Chip air blower	Nozzle type	Reference tool	
Coolant pump	Pump motor 370 W	Ring gauge	
Coolant nozzle	Ring type	High column	+200 mm
Semi-dry unit	Nozzle type, Thru-spindle type	Auto gauging, auto zero offset	Infrared communication type
Coolant level sensor		Auto tool lengh compensation/auto tool breakage detection function	Touch type
Coolant temperature regulator		TAS-S: Thermo Active dimension	
Oil hole device	0.5 MPa, 1.5 MPa	Stabilizer – Spindle (OSP)	
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.	TAS-C: Thermo Active dimension	
In-machine chip discharge	Oil pan: Chip flush	Stabilizer – Construction (OSP)	
Off-machine chip discharge	Hinge conveyor, scraper conveyor See recommended chip conveyor specifications, P31.	Spindle thermal deformation compensation (FANUC)	
Chip bucket	Tilt with/without	Ambient thermal deformation compensation (FANUC)	
Raised machine	50 mm	AbsoScale detection (OSP)	X-Y-Z axis
Workpiece washing gun		Scale feedback (FANUC)	X-Y-Z axis
Air gun mount		Status lamp	
Angle head preps		Foundation bolt	
Manual clamp fixture		Parallel 2-pallet APC	Forms set together with below options.
Hydraulic and pneumatic fixtures			High column 200 mm
Oil skimmer	Belt type		Pallet size 1,150 × 520 mm
Mist collector			Tap pallet, T-slot pallet
			Hydraulic unit (APC drive)

Maximum tool dimensions

Unit: mm (in)


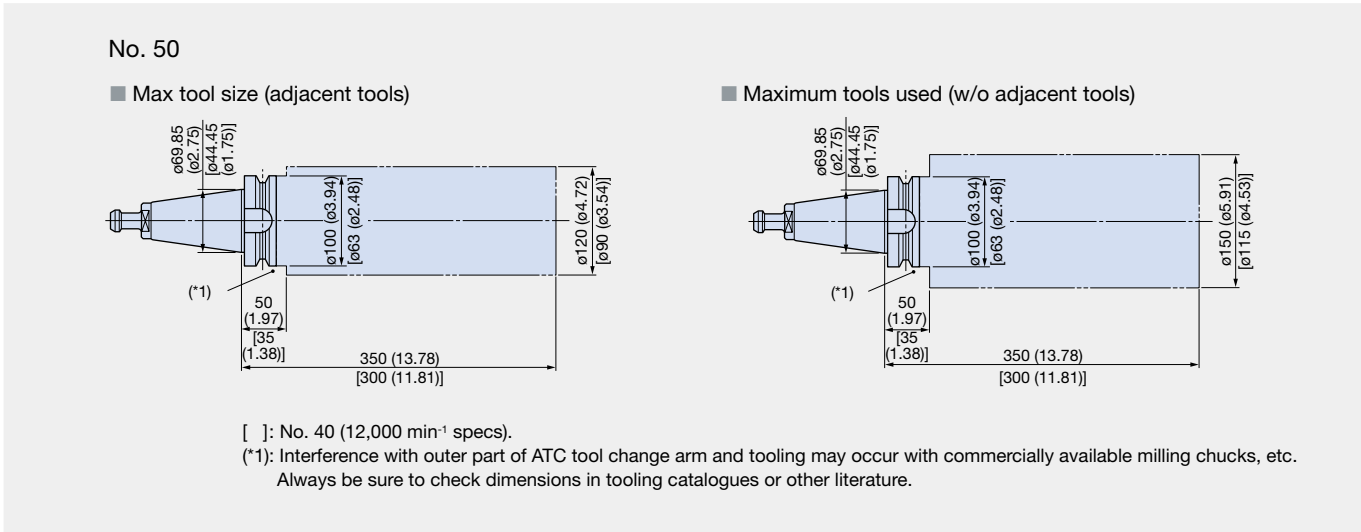



Table size

Unit: mm (in)

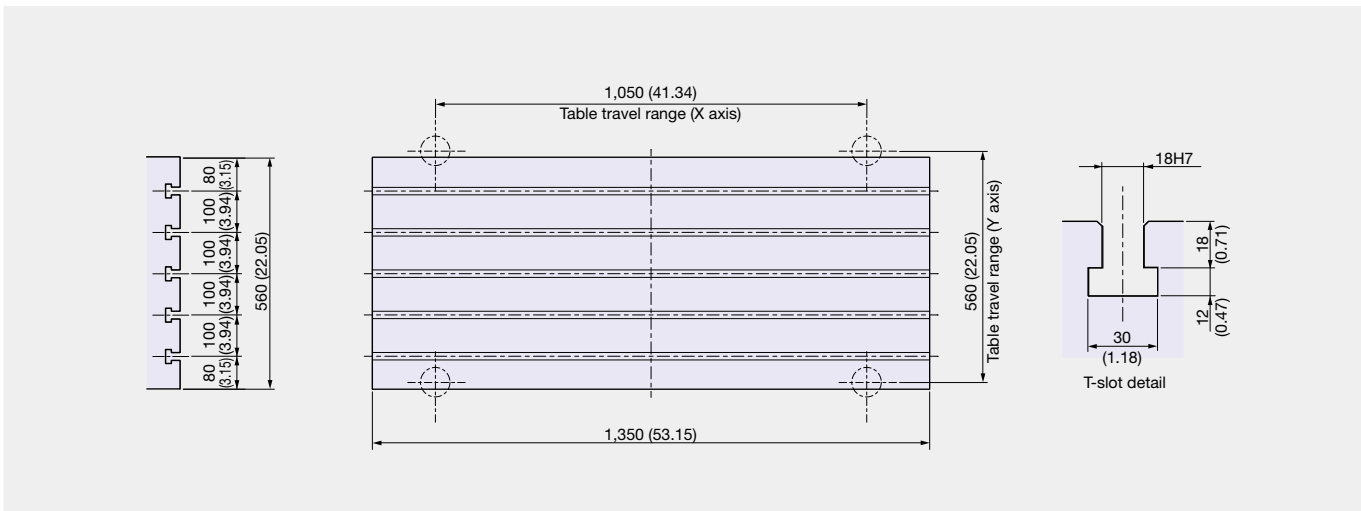


Working range

Unit: mm (in)

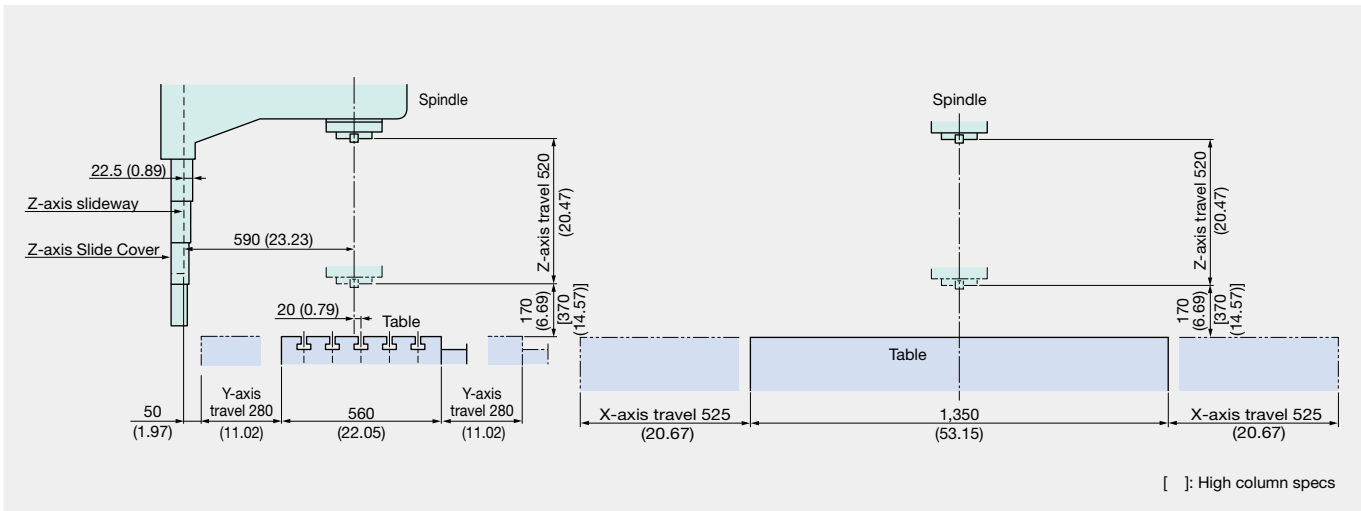

MILLAC 611V II

Vertical Machining Center




Machine Specifications

Item		Unit	MILLAC 611V II				
			No. 50 4,000 min ⁻¹	No. 50 6,000 min ⁻¹	No. 50 12,000 min ⁻¹	No. 40 15,000 min ⁻¹	
Travels	X axis (table R/L)	mm (in)	1,300 (51.18)				
	Y axis (table F/B)	mm (in)	610 (24.02)				
	Z axis (spindle U/D)	mm (in)	560 (22.05)				
	Table top to spindle nose	mm (in)	200 to 760 (7.87 to 29.92)				
	Column to spindle center	mm (in)	650 (25.59)				
Table	Work surface	mm (in)	1,600 × 610 (62.99 × 24.02)				
	Floor to table top	mm (in)	900 (35.43)				
	Max load capacity	kg (lb)	1,500 (3,300)				
Spindle	Spindle speed	min ⁻¹	20 to 4,000	30 to 6,000	50 to 12,000	50 to 15,000	
	Speed ranges		2-speed		Stepless (integral motor/spindle)		
	Tapered bore		7/24 taper No. 50				7/24 taper No. 40
	Bearing dia	mm (in)	ø100 (3.94)		ø90 (3.54)	ø70 (2.76)	
Feedrate	Rapid traverse	m/min (fpm)	X-Y: 20, Z: 16 (X-Y: 66, Z: 52)				
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 10,000 (394)				
Motors	Spindle	kW (hp)	15/11 (20/15) (30 min/cont)		OSP:26/18.5 (35/25) (10 min/cont) FANUC:22/18.5 (30/25) (15 min/cont)		
ATC	Tool storage	tool	20 [30, 42]				
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø150 (ø4.72/ø5.91)			ø115/ø115 (ø4.53/ø4.53)	
	Max tool length	mm (in)	400 (15.75)			300 (11.81)	
	Max tool mass	kg (lb)	20 (44)			8 (17.6)	
Machine size	Height	mm (in)	2,910 (114.57)				
	Floor space	mm (in)	OSP: 3,410 × 3,810 (134.25 × 150.00), FANUC: 3,410 × 3,775 (134.25 × 148.62)				
	Mass	kg (lb)	11,000 (24,200)				
Control			OSP-P300MA, FANUC 31i-B				


[]: Optional

Spindle torque/output graphs


No. 50 4,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 15/11 kW (30 min/cont)
Maximum torque: 512/376 N-m (30 min/cont)

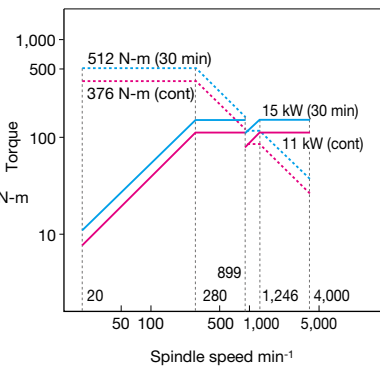

No. 50 6,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 15/11 kW (30 min/cont)
Maximum torque: 376/276 N-m (30 min/cont)

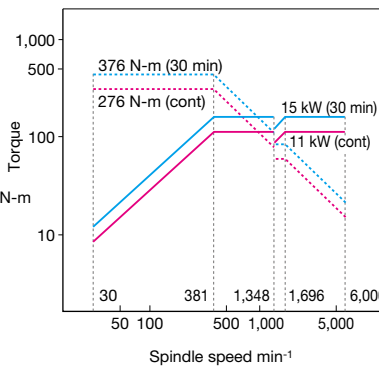


No. 50 12,000 min⁻¹ spindle (OSP)
Maximum output: 26/18.5 kW (10 min/cont)
Maximum torque: 199/146 N-m (5 min/cont)

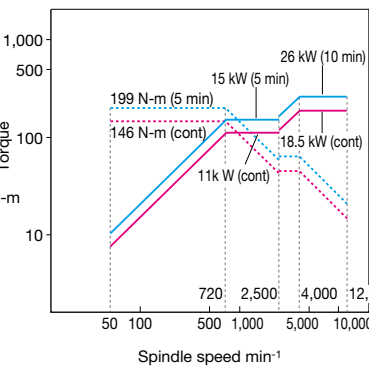

Dimensional drawing/Installation drawing

Unit: mm (in)

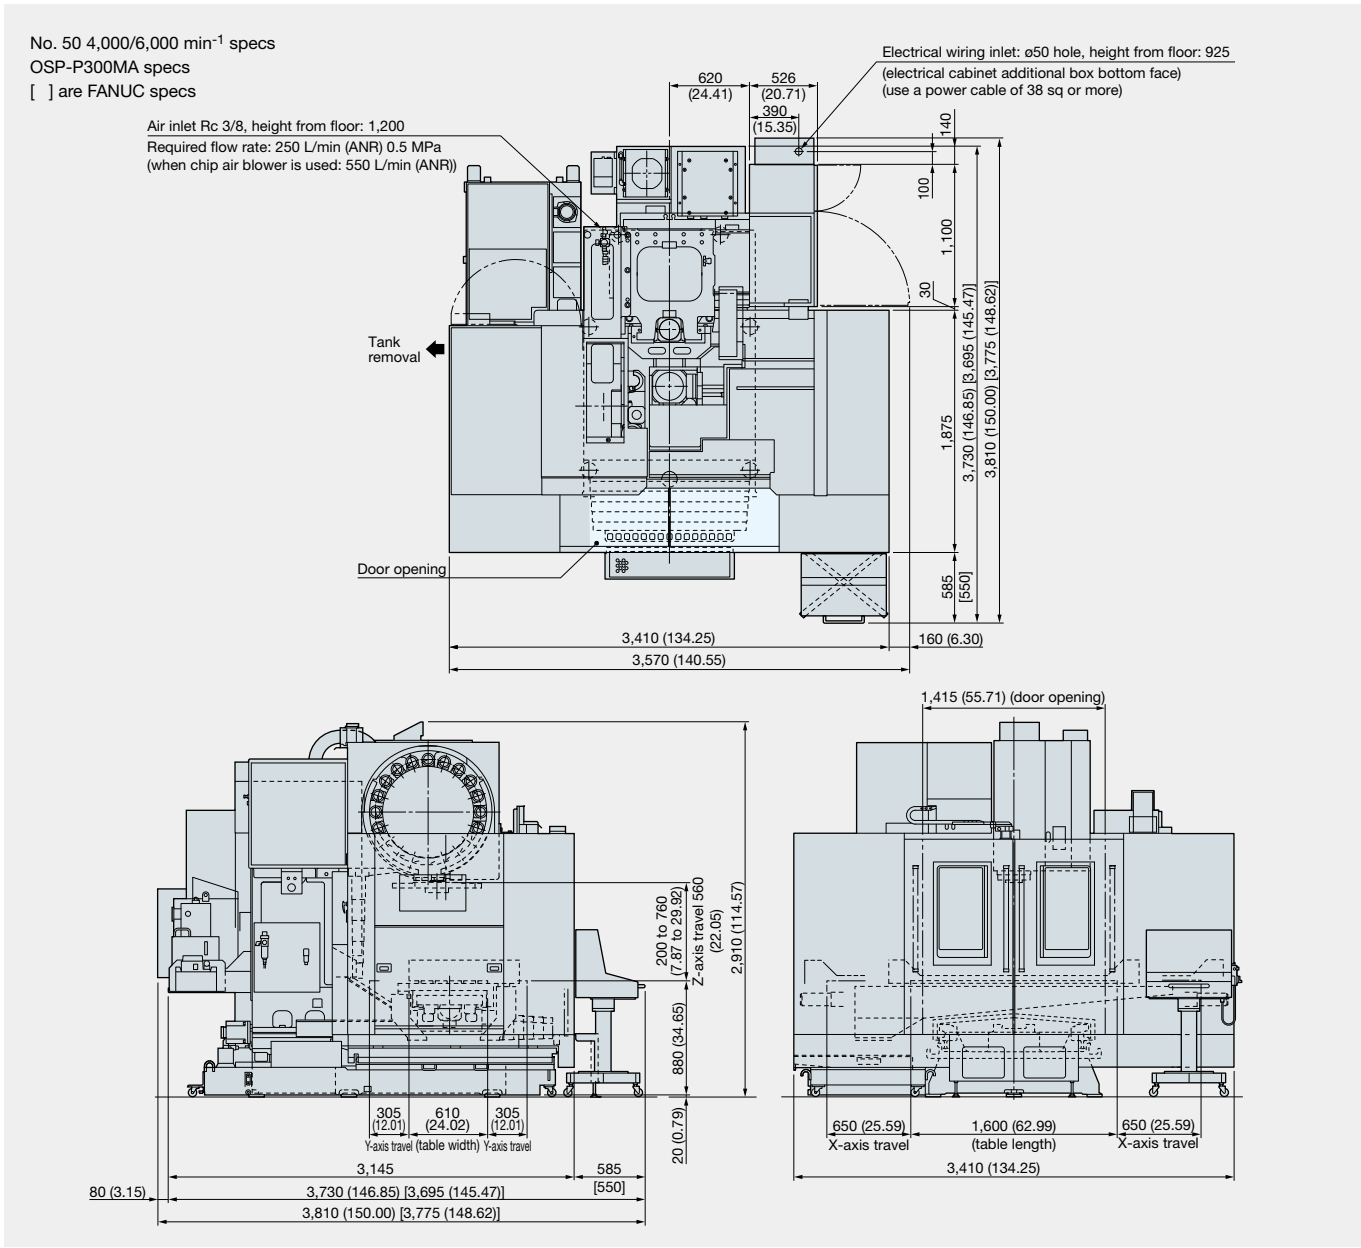

These drawings may differ depending on the destination country or region.

Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm³/min) (in³/min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 spindle 4,000 min ⁻¹ 2-speed gear head	ø125 face mill, 6 blades	304 (18.54)	120 (393.72)	5 (0.20)	90 (3.54)	675 (26.57)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Standard Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	Spindle air curtain	
	FANUC 31i-B	Air cleaner (filter)	Including regulator
Spindle speed	4,000 min ⁻¹ No. 50 2-speed gear head spindle Spindle motor 15/11 kW	Door interlock	
		Pulse handle	Single axis, switchable
		Electronic buzzer	At operation end and alarm times
Spindle nose constraint	BIG-PLUS® (No.50 4,000, 6,000 min ⁻¹ specs)	Foundation blocks / Jack bolts	
		Tool / Tool box	Hand tools
Spindle cooling system	Oil controller	Tool release lever	
ATC magazine	20 tools	Operation panel	Stand type
ATC air blower		TAS-S: Thermo Active dimension	
Full-enclosure	With ceiling	Stabilizer – Spindle (OSP)	
Slideway lubricating equipemnt		TAS-C: Thermo Active dimension	
In-machine chip discharge	Table rear: Coil type*1	Stabilizer – Construction (OSP)	
Chip pan		Spindle thermal deformation compensation (FANUC)	
Coolant supply system	Tank: 350 L, Pump motor: 180 W	Ambient thermal deformation compensation (FANUC)	
Coolant nozzle	3 flexible nozzles		
Work lamp	LED		

*1: “Required” optional specs

Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
Spindle speed 6,000 min ⁻¹	No. 50 2-speed gear head spindle 15/11 kW	Air gun mount	
		Angle head preps	
Spindle speed 12,000 min ⁻¹	No. 50 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Manual clamp fixture	
		Hydraulic and pneumatic fixtures	
Spindle speed 15,000 min ⁻¹	No. 40 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Oil skimmer	Belt type
		Mist collector	
ATC magazine	30 tools, 42 tools	Rotary table	NC, tilt, indexing
Chip air blower	Nozzle type	Sub table	1,600 × 610 × 90 mm
Coolant pump	Pump motor 370 W	Reference tool	
Coolant nozzle	Ring type	Ring gauge	
Semi-dry unit	Nozzle type, Thru-spindle type	High column	+200 mm
Coolant level sensor		Auto gauging, auto zero offset	Infrared communication type
Coolant temperature regulator		Auto tool lengh compensation/auto tool breakage detection function	Touch type
Oil hole device	0.5 MPa, 1.5 MPa		
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.	Main operating panel pendant type	
Spindle nose constraint	BIG-PLUS® No. 50 12,000 min ⁻¹ No. 40 15,000 min ⁻¹	AbsoScale detection (OSP)	X-Y-Z axis
		Scale feedback (FANUC)	X-Y-Z axis
		Status lamp	
In-machine chip discharge	Oil pan: Chip flush	Foundation bolt	
Off-machine chip discharge	Hinge conveyor, scraper conveyor See recommended chip conveyor specifications, P31.	Parallel 2-pallet APC	Forms set together with below options.
Chip bucket	Tilt with/without		High column 200 mm
Raised machine	100 mm		Pallet size 1,400 × 580 mm
Workpiece washing gun			Tap pallet, T-slot pallet

Maximum tool dimensions

Unit: mm (in)


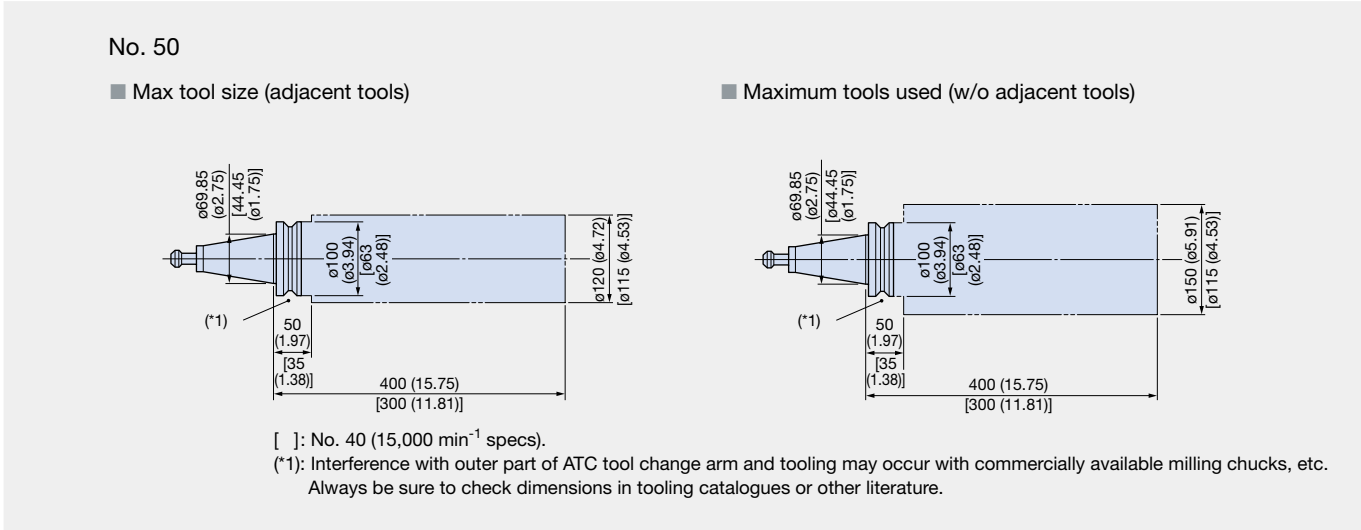



Table size

Unit: mm (in)

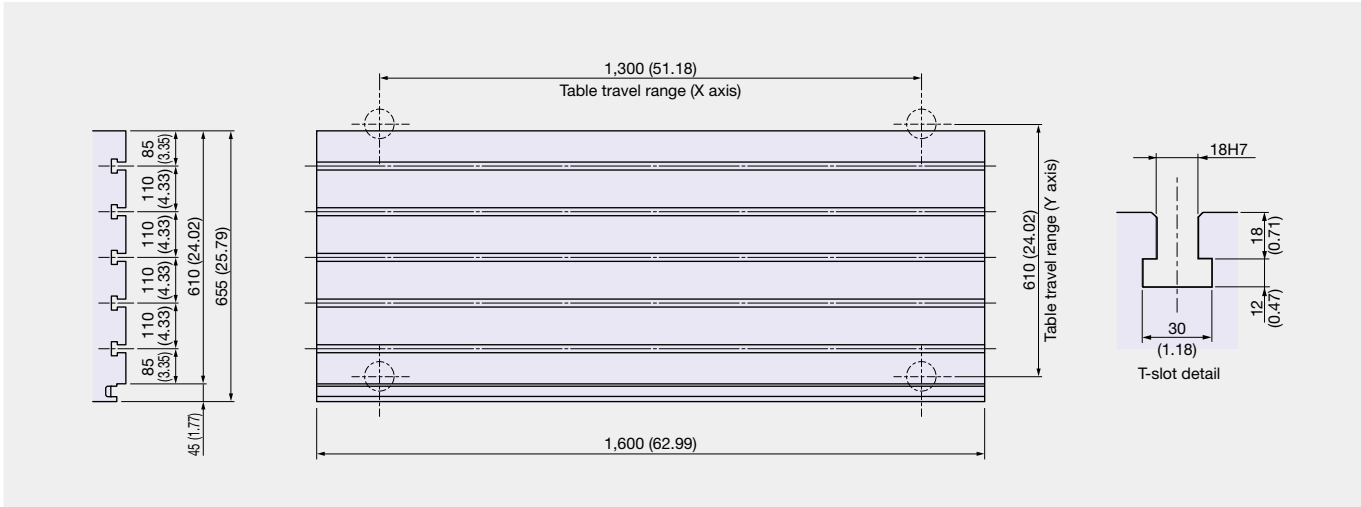


Working range

Unit: mm (in)

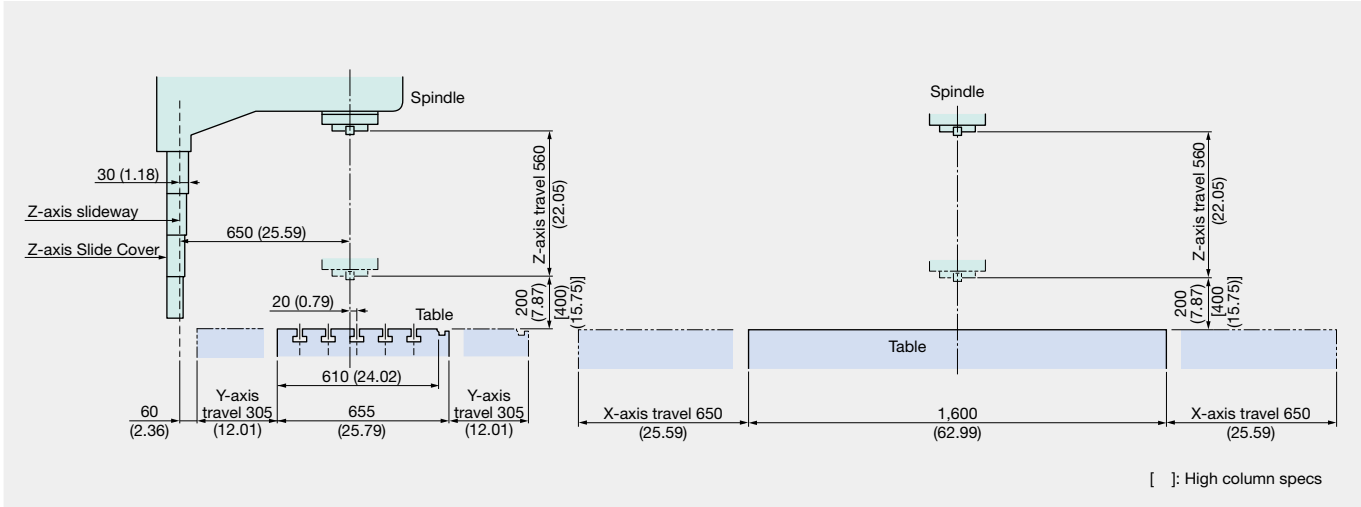

MILLAC 761V II

Vertical Machining Center



Machine Specifications


Photos shown in this brochure may also show optional equipment.

Item		Unit	MILLAC 761V II			
			No. 50 4,000 min ⁻¹	No. 50 6,000 min ⁻¹	No. 50 12,000 min ⁻¹	No. 40 15,000 min ⁻¹
Travels	X axis (table R/L)	mm (in)	1,540 (60.63)			
	Y axis (table F/B)	mm (in)	760 (29.92)			
	Z axis (spindle U/D)	mm (in)	660 (25.98)			
	Table top to spindle nose	mm (in)	200 to 860 (7.87 to 33.86)			
	Column to spindle center	mm (in)	800 (31.50)			
Table	Work surface	mm (in)	1,800 × 720 (70.87 × 28.35)			
	Floor to table top	mm (in)	1,030 (40.55)			
	Max load capacity	kg (lb)	2,000 (4,400)			
Spindle	Spindle speed	min ⁻¹	20 to 4,000	30 to 6,000	50 to 12,000	50 to 15,000
	Speed ranges		2-speed		Stepless (integral motor/spindle)	
	Tapered bore		7/24 taper No. 50			7/24 taper No. 40
	Bearing dia	mm (in)	ø100 (3.94)		ø90 (3.54)	ø70 (2.76)
Feedrate	Rapid traverse	m/min (fpm)	X-Y-Z: 16 (52)			
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 10,000 (394)			
Motors	Spindle	kW (hp)	18.5/15 (25/20) (30 min/cont)		OSP:26/18.5 (35/25) (10 min/cont) FANUC:22/18.5 (30/25) (15 min/cont)	
ATC	Tool storage	tool	36 [54]			
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø200 (ø4.72/ø7.87)			ø115/ø115 (ø4.53/ø4.53)
	Max tool length	mm (in)	400 (15.75)			300 (11.81)
	Max tool mass	kg (lb)	20 (44)			8 (17.6)
Machine size	Height	mm (in)	3,230 (127.17)		3,100 (122.05)	
	Floor space	mm (in)	OSP: 4,300 × 4,160 (169.29 × 163.78), FANUC: 4,300 × 4,110 (169.29 × 161.81)			
	Mass	kg (lb)	14,300 (31,460)			
Control			OSP-P300MA, FANUC 31i-B			


[]: Optional

Spindle torque/output graphs


No. 50 4,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 18.5/15 kW (30 min/cont)
Maximum torque: 587/476 N-m (30 min/cont)

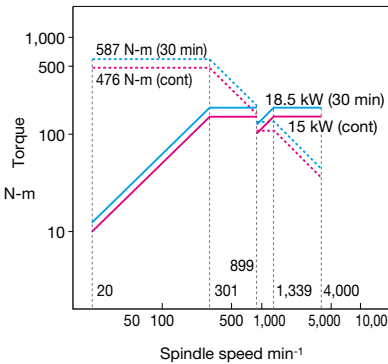

No. 50 6,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 18.5/15 kW (30 min/cont)
Maximum torque: 481/390 N-m (30 min/cont)

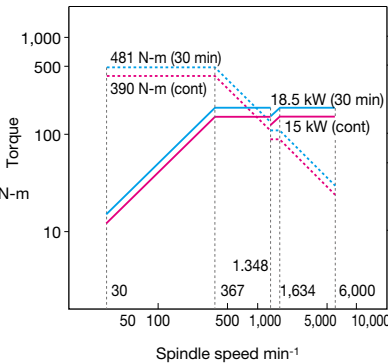


No. 50 12,000 min⁻¹ spindle (OSP)
Maximum output: 26/18.5 kW (10 min/cont)
Maximum torque: 199/146 N-m (5 min/cont)

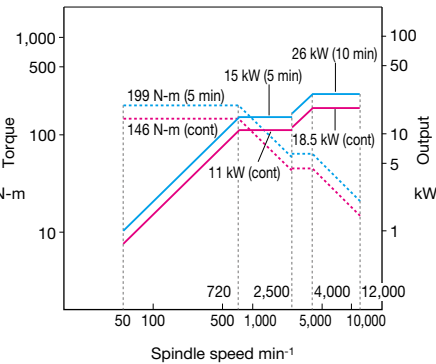

Dimensional drawing/Installation drawing

Unit: mm (in)

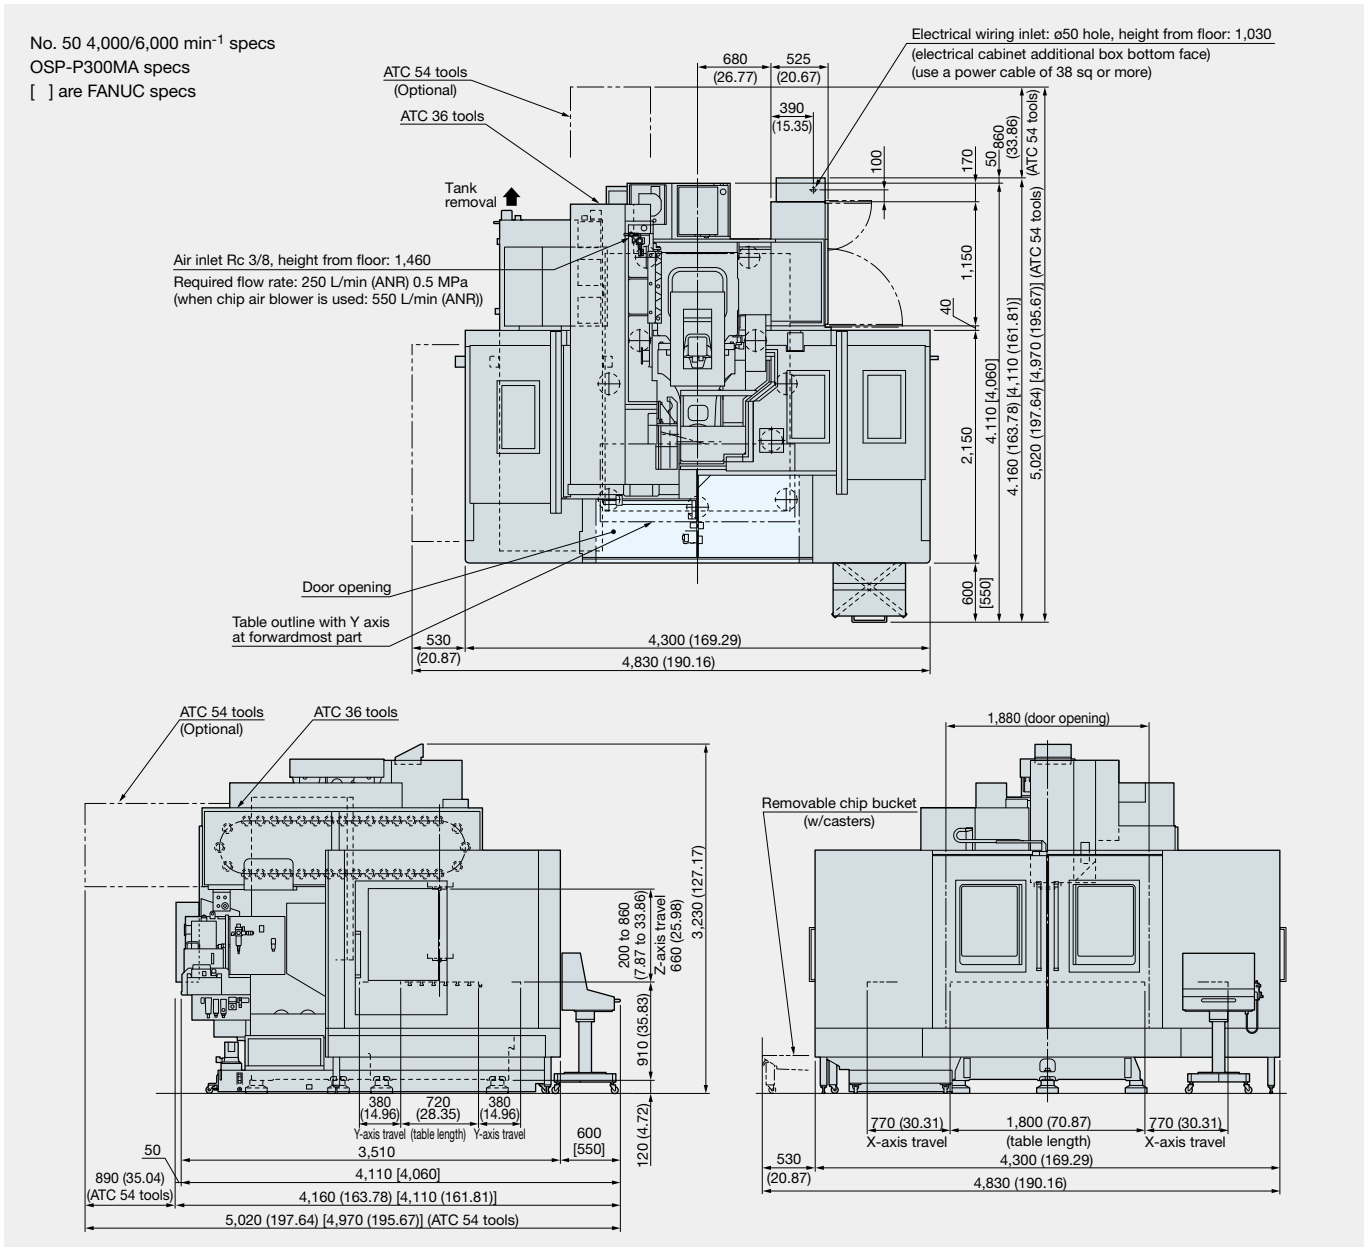

These drawings may differ depending on the destination country or region.

■ Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm ³ /min) (in ³ /min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 spindle 4,000 min ⁻¹ 2-speed gear head	ø150 face mill 8 blades	540 (32.94)	165 (541.37)	5 (0.20)	90 (3.54)	1,200 (47.24)
		485 (29.59)	165 (541.37)	7 (0.28)	90 (3.54)	770 (30.31)
	ø40 roughing end mill	252 (15.37)	25 (82.03)	40 (1.57)	30 (1.18)	210 (8.27)
		252 (15.37)	25 (82.03)	30 (1.18)	40 (1.57)	210 (8.27)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

■ Standard Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	Spindle air curtain	
	FANUC 31i-B	Air cleaner (filter)	Including regulator
Spindle speed	4,000 min ⁻¹ No. 50	Door interlock	
	2-speed gear head spindle	Pulse handle	Single axis, switchable
	Spindle motor 18.5/15 kW	Electronic buzzer	At operation end and alarm times
Spindle nose constraint	BIG-PLUS [®] (No. 50 4,000, 6,000 min ⁻¹ specs)	Foundation blocks / Jack bolts	
		Tool / Tool box	Hand tools
Spindle cooling system	Oil controller	Tool release lever	
ATC magazine	36 tools	Operation panel	Stand type
ATC air blower		TAS-S: Thermo Active dimension	
Full-enclosure	With ceiling	Stabilizer – Spindle (OSP)	
Slideway lubricating equipemnt		TAS-C: Thermo Active dimension	
In-machine conveyor	Table rear: Coil type	Stabilizer – Construction (OSP)	
Chip pan		Spindle thermal deformation	
Coolant supply system	Tank: 400 L, Pump motor: 250 W	compensation (FANUC)	
Coolant nozzle	3 flexible nozzles	Ambient thermal deformation	
Work lamp	LED	compensation (FANUC)	

■ Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
Spindle speed 6,000 min ⁻¹	No. 50 2-speed gear head spindle 18.5/15 kW	Raised machine	100 mm
Spindle speed 12,000 min ⁻¹	No. 50 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Workpiece washing gun	
Spindle speed 15,000 min ⁻¹	No. 40 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Air gun mount	
ATC magazine	54 tools	Angle head preps	
Chip air blower	Nozzle type	Manual clamp fixture	
Coolant pump	Pump motor: 550 W	Hydraulic and pneumatic fixtures	
Coolant nozzle	Ring type	Oil skimmer	Belt type
Semi-dry unit	Nozzle type, Thru-spindle type	Mist collector	
Coolant level sensor		Rotary table	NC, tilt, indexing
Coolant temperature regulator		Sub table	1,800 × 720 × 100 mm
Oil hole device	0.5 MPa, 1.5 MPa	Reference tool	
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.	Ring gauge	
Spindle nose constraint	BIG-PLUS® No. 50 12,000 min ⁻¹ No. 40 15,000 min ⁻¹	High column	+200 mm
In-machine chip discharge	Oil pan: Chip flush	Auto gauging, auto zero offset	Infrared communication type
Off-machine chip discharge	Hinge conveyor, scraper conveyor See recommended chip conveyor specifications, P31.	Auto tool length compensation/auto tool breakage detection function	Touch type
Chip bucket	Tilt with/without	AbsoScale detection (OSP)	X-Y-Z axis
		Scale feedback (FANUC)	X-Y-Z axis
		Status lamp	
		Foundation bolt	
		Parallel 2-pallet APC	Forms set together with below options. High column 200 mm Pallet size 1,700 × 700 mm Tap pallet, T-slot pallet


■ Maximum tool dimensions

Unit: mm (in)



■ Max tool size (adjacent tools)

■ Maximum tools used (w/o adjacent tools)

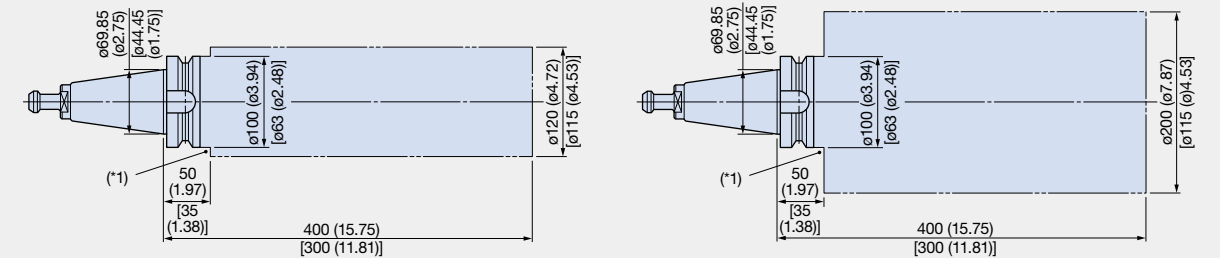


[]: No. 40 (15,000 min⁻¹ specs).

(*1): Interference with outer part of ATC tool change arm and tooling may occur with commercially available milling chucks, etc.
Always be sure to check dimensions in tooling catalogues or other literature.


■ **Table size**

Unit: mm (in)

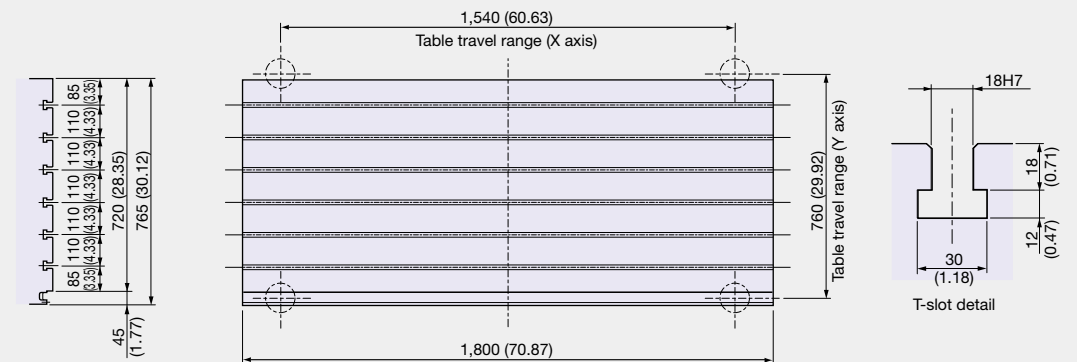

■ Working range

Unit: mm (in)

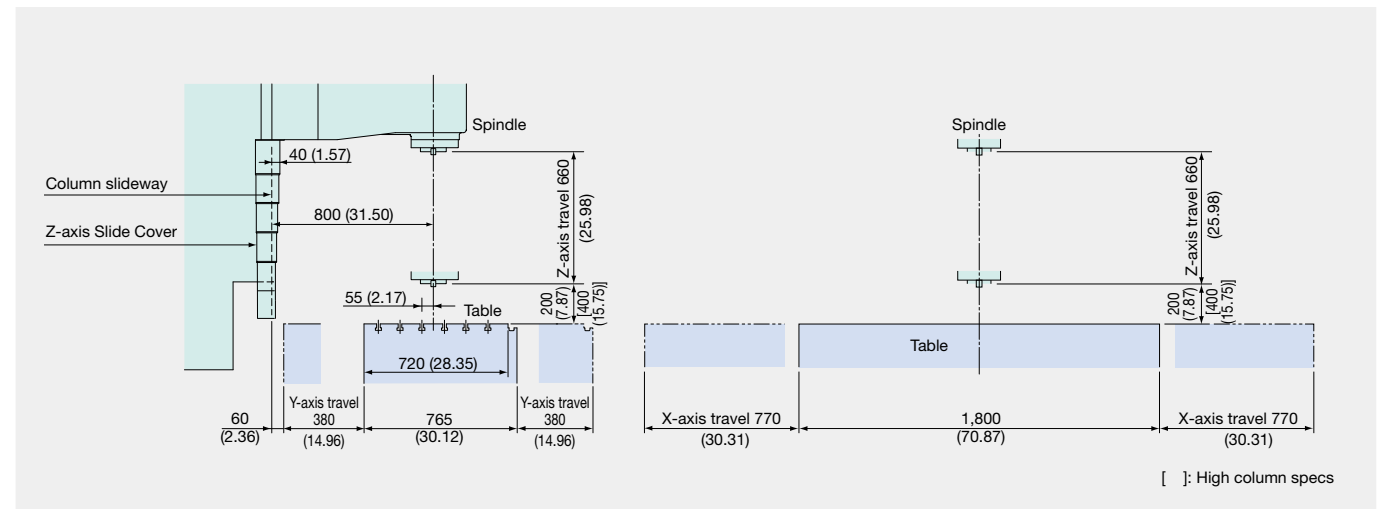

MILLAC 852V II

Vertical Machining Center




Machine Specifications

Photos shown in this brochure may also show optional equipment.


Item		Unit	MILLAC 852V II			
			No. 50 4,000 min ⁻¹	No. 50 6,000 min ⁻¹	No. 50 12,000 min ⁻¹	No. 40 15,000 min ⁻¹
Travels	X axis (table R/L)	mm (in)	2,050 <3,050> (80.71 <120.08>)			
	Y axis (table F/B)	mm (in)	850 (33.46)			
	Z axis (spindle U/D)	mm (in)	750 (29.53)			
	Table top to spindle nose	mm (in)	200 to 950 <160 to 910> (7.87 to 37.40 <6.30 to 35.83>)			
	Column to spindle center	mm (in)	900 (35.43)			
Table	Work surface	mm (in)	2,200 <3,200> × 850 (86.61 <125.98> × 33.46)			
	Floor to table top	mm (in)	1,060 <1,100> (41.73 <43.31>)			
	Max load capacity	kg (lb)	2,500 <3,800> (5,500 <8,360>)			
Spindle	Spindle speed	min ⁻¹	20 to 4,000	30 to 6,000	50 to 12,000	50 to 15,000
	Speed ranges		2-speed		Stepless (integral motor/spindle)	
	Tapered bore		7/24 taper No. 50			7/24 taper No. 40
	Bearing dia	mm (in)	ø100 (3.94)		ø90 (3.54)	ø70 (2.76)
Feedrate	Rapid traverse	m/min (fpm)	X-Y-Z: 16 <X-Y: 12, Z: 16> (X-Y-Z: 52 <X-Y: 39, Z: 52>)			
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 10,000 (394)			
Motors	Spindle	kW (hp)	18.5/15 (25/20) (30 min/cont)		OSP:26/18.5 (35/25) (10 min/cont) FANUC:22/18.5 (30/25) (15 min/cont)	
ATC	Tool storage	tool	36 [54]			
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø200 (ø4.72/ø7.87)			ø115/ø115 (ø4.53/ø4.53)
	Max tool length	mm (in)	400 (15.75)			300 (11.81)
	Max tool mass	kg (lb)	20 (44)			8 (17.6)
Machine size	Height	mm (in)	3,350 (131.89)		3,320 (130.71)	
	Floor space	mm (in)	OSP: 5,460 × 4,495 (214.96 × 176.97), FANUC: 5,460 × 4,445 (214.96 × 175.00) <OSP: 7,460 × 4,495 (293.70 × 176.97), FANUC: 7,460 × 4,445 (293.70 × 175.00)>			
	Mass	kg (lb)	20,500 <22,500> (45,100 <49,500>)			
Control			OSP-P300MA, FANUC 31i-B			

Spindle torque/output graphs


No. 50 4,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 18.5/15 kW (30 min/cont)
Maximum torque: 587/476 N-m (30 min/cont)

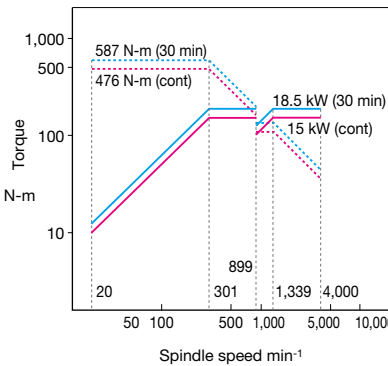

No. 50 6,000 min⁻¹ spindle (OSP, FANUC)
Maximum output: 18.5/15 kW (30 min/cont)
Maximum torque: 481/390 N-m (30 min/cont)

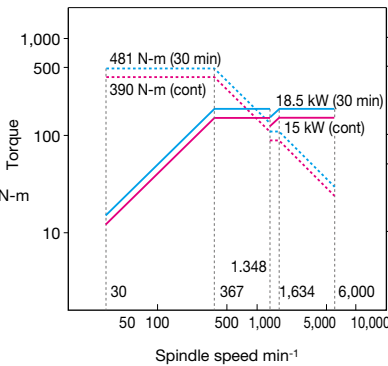


No. 50 12,000 min⁻¹ spindle (OSP)
Maximum output: 26/18.5 kW (10 min/cont)
Maximum torque: 199/146 N-m (5 min/cont)

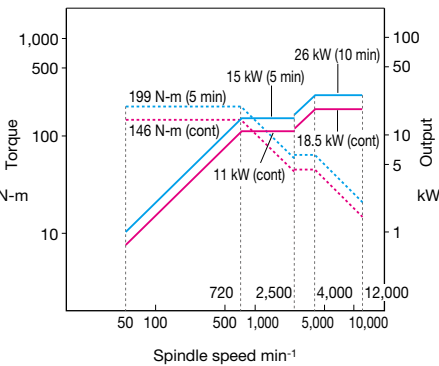

Dimensional drawing/Installation drawing

Unit: mm (in)

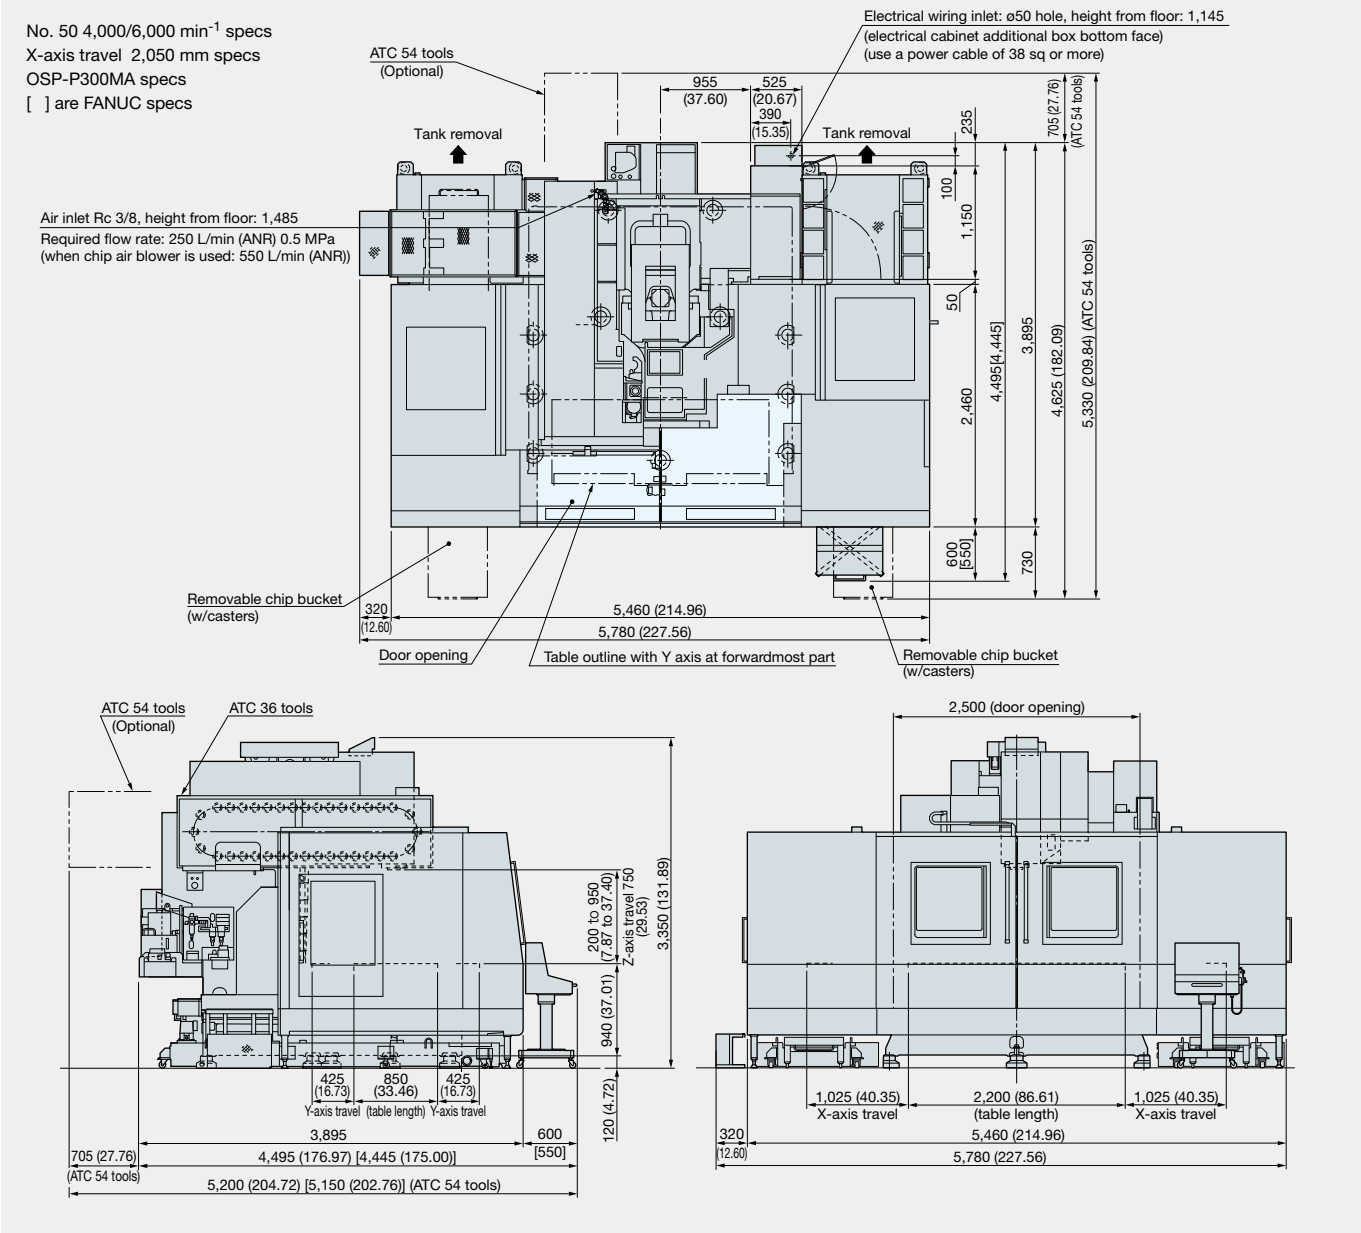

These drawings may differ depending on the destination country or region.

■ Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm ³ /min) (in ³ /min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 spindle 4,000 min ⁻¹ 2-speed gear head	ø150 face mill 8 blades	540 (32.94)	165 (541.37)	5 (0.20)	90 (3.54)	1,200 (47.24)
		485 (29.59)	165 (541.37)	7 (0.28)	90 (3.54)	770 (30.31)
	ø40 roughing end mill	252 (15.37)	25 (82.03)	40 (1.57)	30 (1.18)	210 (8.27)
		252 (15.37)	25 (82.03)	30 (1.18)	40 (1.57)	210 (8.27)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

■ Standard Specifications and Accessories


Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	Spindle air curtain	
	FANUC 31i-B	Air cleaner (filter)	Including regulator
Spindle speed	4,000 min ⁻¹ No. 50	Door interlock	
	2-speed gear head spindle	Pulse handle	Single axis, switchable
	Spindle motor 18.5/15 kW	Electronic buzzer	At operation end and alarm times
Spindle nose constraint	BIG-PLUS® (No. 50 4,000, 6,000 min ⁻¹ specs)	Foundation blocks / Jack bolts	
		Tool / Tool box	Hand tools
Spindle cooling system	Oil controller	Tool release lever	
ATC magazine	36 tools	Operation panel	Stand type
ATC air blower		TAS-S: Thermo Active dimension	
Full-enclosure	With ceiling	Stabilizer – Spindle (OSP)	
Slideway lubricating equipemnt		TAS-C: Thermo Active dimension	
In-machine conveyor	Table rear: Coil type	Stabilizer – Construction (OSP)	
Chip pan		Spindle thermal deformation	
Coolant supply system	Tank: 900 L, Pump motor: 250 W	compensation (FANUC)	
Coolant nozzle	3 flexible nozzles	Ambient thermal deformation	
Work lamp	LED	compensation (FANUC)	

Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
Spindle speed 6,000 min ⁻¹	No. 50 2-speed gear head spindle 18.5/15 kW	Raised machine	100 mm
		Workpiece washing gun	
Spindle speed 12,000 min ⁻¹	No. 50 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Air gun mount	
		Angle head preps	
Spindle speed 15,000 min ⁻¹	No. 40 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Manual clamp fixture	
		Hydraulic and pneumatic fixtures	
ATC magazine	54 tools	Oil skimmer	Belt type
Chip air blower	Nozzle type	Mist collector	
Coolant pump	Pump motor : 550 W	Rotary table	NC, tilt, indexing
Coolant nozzle	Ring type	Sub table	2,200 × 850 × 100 mm
Semi-dry unit	Nozzle type, Thru-spindle type	Reference tool	
Coolant level sensor		Ring gauge	
Coolant temperature regulator		High column	+200 mm
Oil hole device	0.5 MPa, 1.5 MPa	Auto gauging, auto zero offset	Infrared communication type
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.	Auto tool length compensation/auto tool breakage detection function	Touch type
Spindle nose constraint	BIG-PLUS® No. 50 12,000 min ⁻¹ No. 40 15,000 min ⁻¹	AbsoScale detection (OSP)	X-Y-Z axis
		Scale feedback (FANUC)	X-Y-Z axis
		Status lamp	
In-machine chip discharge	Oil pan: Chip flush	Foundation bolt	
		Parallel 2-pallet APC (X-axis travel 2,050 mm specifications only)	Forms set together with below options.
Off-machine chip discharge	Hinge conveyor, scraper conveyor See recommended chip conveyor specifications, P31.		High column 200 mm Pallet size 2,200 × 820 mm
Chip bucket	Tilt with/without		Tap pallet, T-slot pallet


■ Maximum tool dimensions

Unit: mm (in)

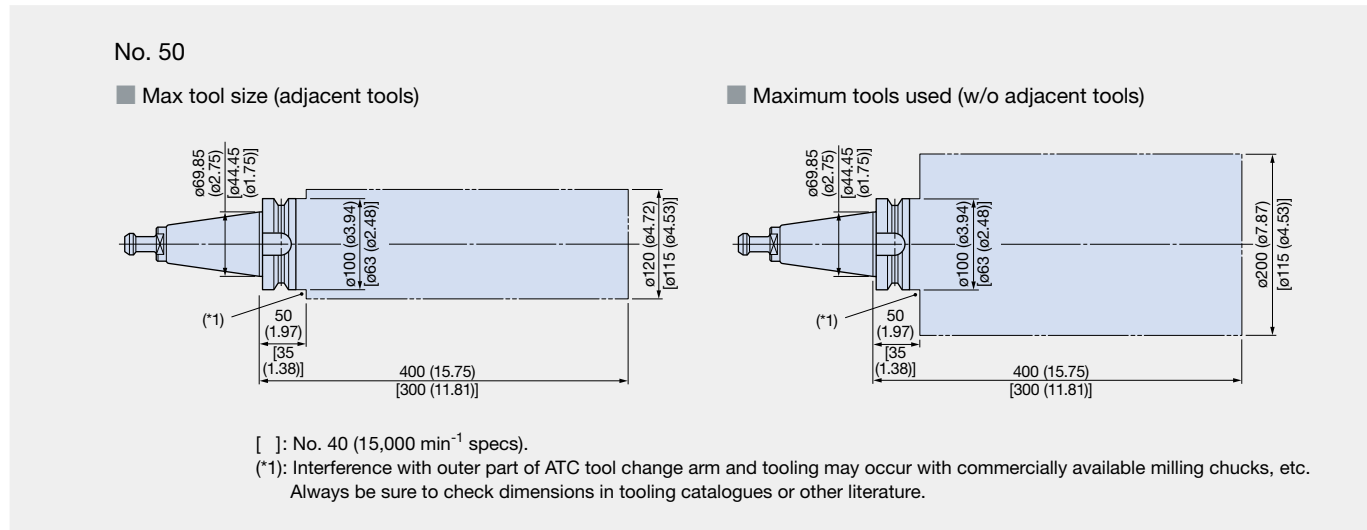


■ Table size

Unit: mm (in)

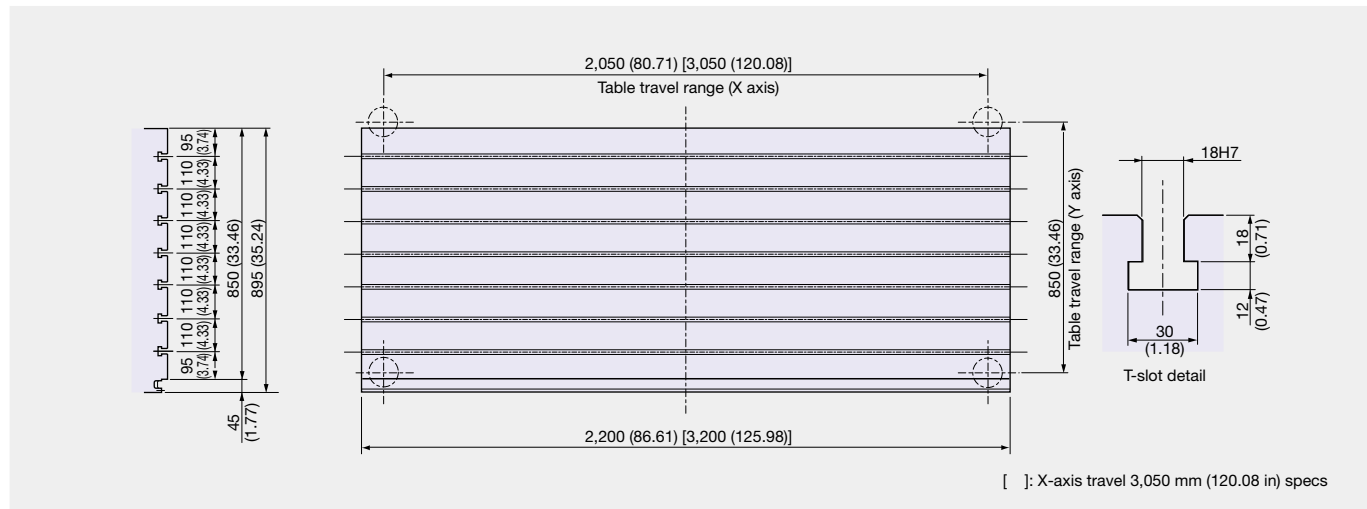

■ Working range

Unit: mm (in)

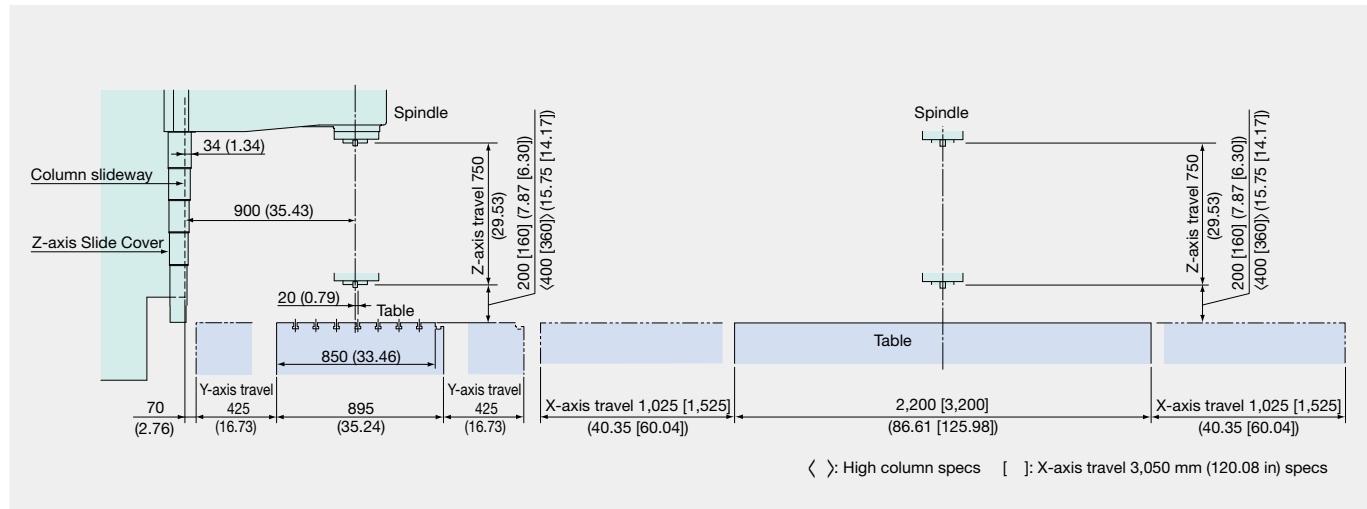

MILLAC 1052V II
Vertical Machining Center




Machine Specifications

Photos shown in this brochure may also show optional equipment.


Item		Unit	MILLAC 1052V II			
			No. 50 4,000 min ⁻¹	No. 50 6,000 min ⁻¹	No. 50 12,000 min ⁻¹	No. 40 15,000 min ⁻¹
Travels	X axis (table R/L)	mm (in)	2,050 <3,050> (80.71 <120.08>)			
	Y axis (table F/B)	mm (in)	1,060 (41.73)			
	Z axis (spindle U/D)	mm (in)	800 (31.50)			
	Table top to spindle nose	mm (in)	200 to 1,000 <160 to 960> (7.87 to 39.37 <6.30 to 37.80>)			
	Column to spindle center	mm (in)	1,100 (43.31)			
Table	Work surface	mm (in)	2,200 <3,200> × 1,050 (86.61 <125.98> × 41.34)			
	Floor to table top	mm (in)	1,060 <1,150> (41.73 <45.28>)			
	Max load capacity	kg (lb)	5,000 (11,000)			
Spindle	Spindle speed	min ⁻¹	20 to 4,000	30 to 6,000	50 to 12,000	50 to 15,000
	Speed ranges		2-speed		Stepless (integral motor/spindle)	
	Tapered bore		7/24 taper No. 50			7/24 taper No. 40
	Bearing dia	mm (in)	ø100 (3.94)		ø90 (3.54)	ø70 (2.76)
Feedrate	Rapid traverse	m/min (fpm)	X-Y-Z: 16 <X-Y: 12, Z: 16> (X-Y-Z: 52 <X-Y: 39, Z: 52>)			
	Cutting feedrate	mm/min (ipm)	X-Y-Z: 10,000 (394)			
Motors	Spindle	kW (hp)	22/18.5 (30/25) (30 min/cont)		OSP:26/18.5 (35/25) (10 min/cont) FANUC:22/18.5 (30/25) (15 min/cont)	
ATC	Tool storage	tool	36 [54]			
	Max tool dia (w, w/o adj tool)	mm (in)	ø120/ø200 (ø4.72/ø7.87)			ø115/ø115 (ø4.53/ø4.53)
	Max tool length	mm (in)	400 (15.75)			300 (11.81)
	Max tool mass	kg (lb)	20 (44)			8 (17.6)
Machine size	Height	mm (in)	3,520 <3,570> (138.58 <140.55>)			
	Floor space	mm (in)	6,760 × 4,560 <9,065 × 4,560> (266.14 × 179.53 <356.89 × 179.53>)			
	Mass	kg (lb)	25,200 <29,600> (55,440 <65,120>)			
Control			OSP-P300MA, FANUC 31i-B			

< >: X-axis travel 3,050 mm specs []: Optional

Spindle torque/output graphs

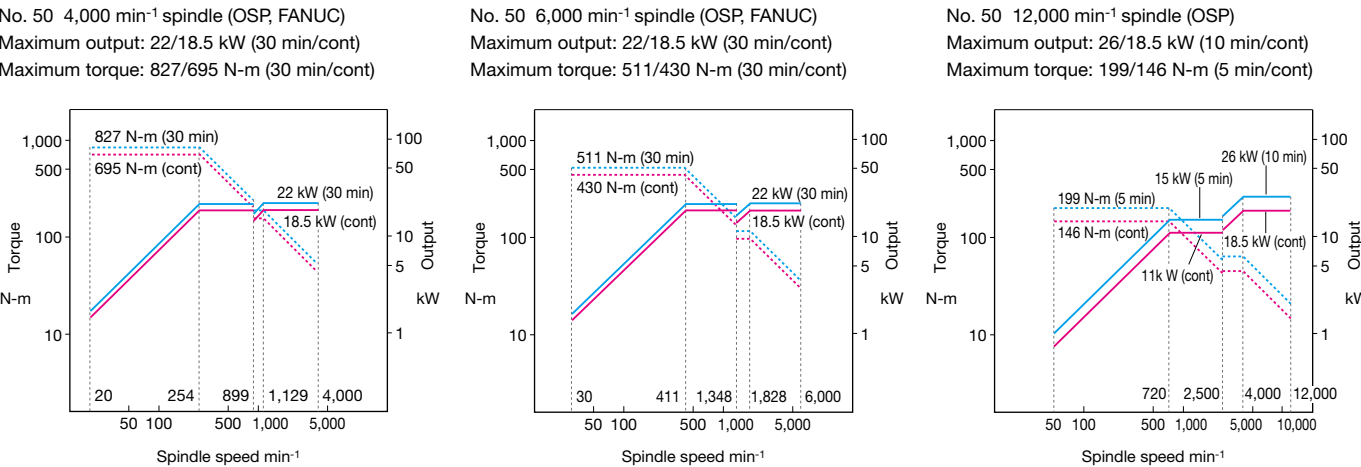

Dimensional drawing/Installation drawing

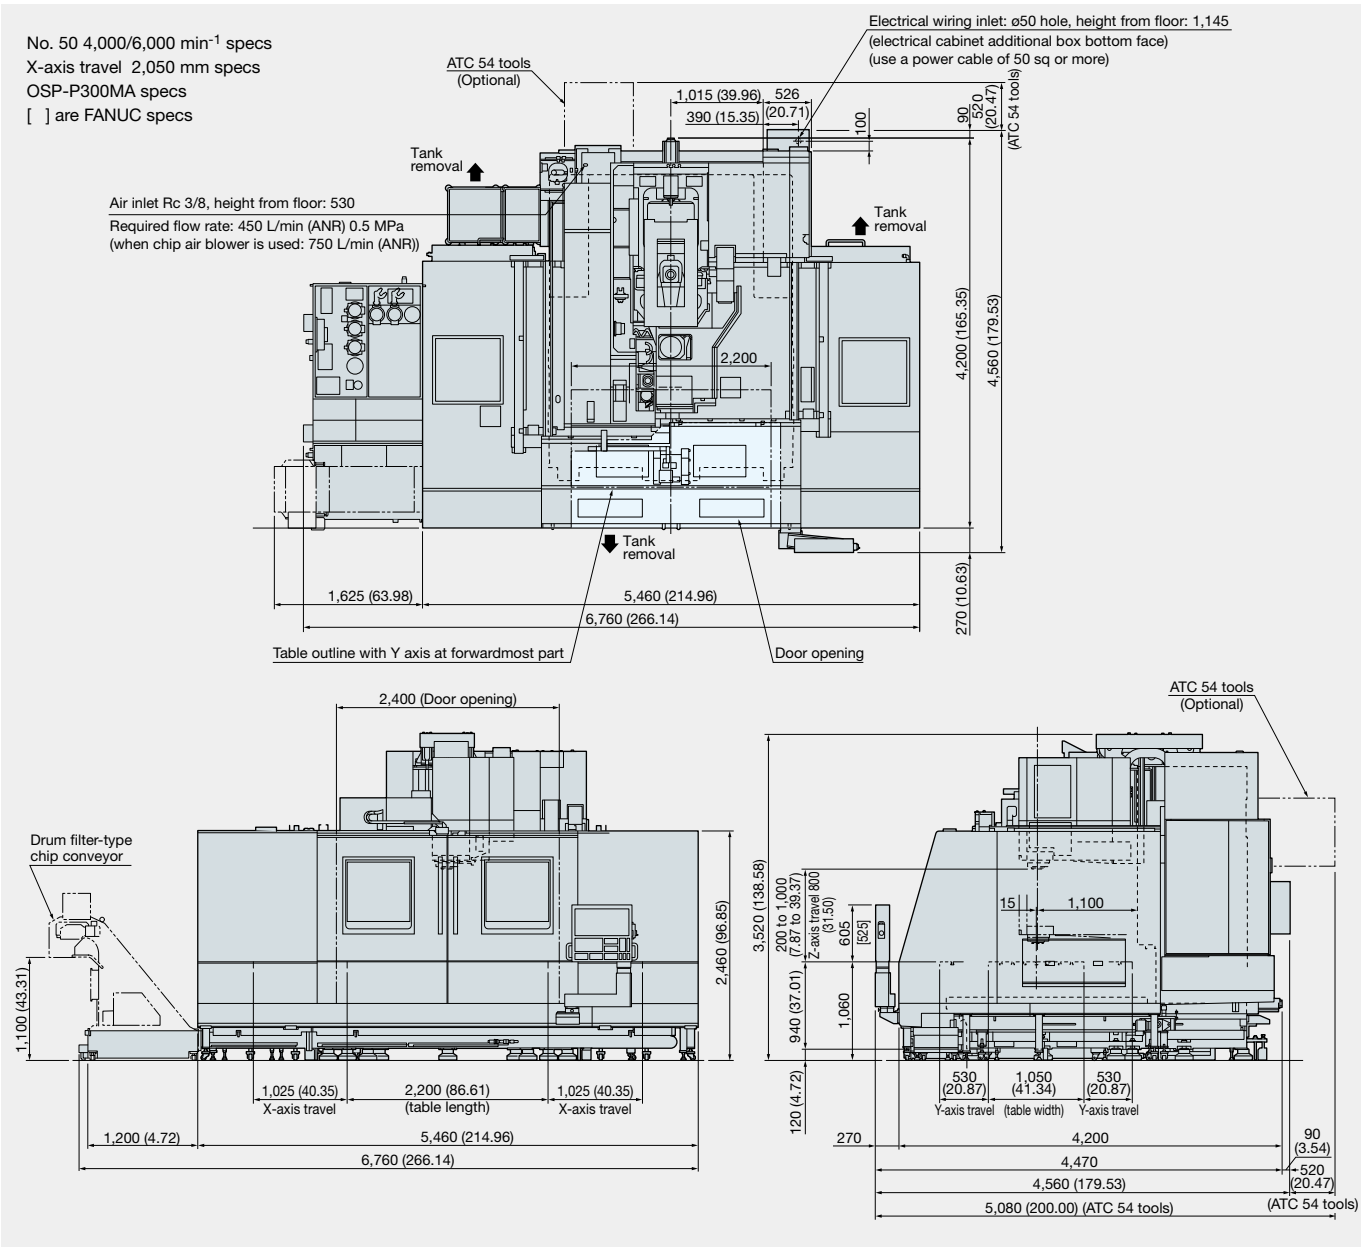

These drawings may differ depending on the destination country or region.

Machining Capacity (Material: S45C)

	Tool	Cutting Capacity (cm³/min) (in³/min)	Cutting Speed (m/min) (fpm)	Cutting Depth (mm) (in)	Cutting Width (mm) (in)	Feedrate (mm/min) (ipm)
No. 50 spindle 4,000 min ⁻¹ 2-speed gear head	ø150 face mill 8 blades	720 (43.92)	165 (541.37)	5 (0.20)	90 (3.54)	1,600 (62.99)
		756 (46.12)	165 (541.37)	7 (0.28)	90 (3.54)	1,200 (47.24)
	ø40 roughing end mill	360 (21.96)	25 (82.03)	30 (1.18)	40 (1.57)	300 (11.81)

Note: The “actual data” referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting, and other conditions.

Standard Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
CNC	OSP-P300MA	Work lamp	LED
	FANUC 31i-B	Spindle air curtain	
Spindle speed	4,000 min ⁻¹ No. 50 2-speed gear head spindle Spindle motor 22/18.5 kW	Air cleaner (filter)	Including regulator
		Door interlock	
		Pulse handle	Single axis, switchable
Spindle nose constraint	BIG-PLUS® (No. 50 4,000, 6,000 min ⁻¹ specs)	Electronic buzzer	At operation end and alarm times
		Foundation blocks / Jack bolts	
Spindle cooling system	Oil controller	Tool / Tool box	Hand tools
ATC magazine	36 tools	Tool release lever	
ATC air blower		TAS-S: Thermo Active dimension	
Full-enclosure	With ceiling	Stabilizer – Spindle (OSP)	
Slideway lubricating equipemnt		TAS-C: Thermo Active dimension	
In-machine conveyor	Table rear: Coil type	Stabilizer – Construction (OSP)	
	Table left: floor type, table right: pan	Spindle thermal deformation compensation (FANUC)	
Chip pan		Ambient thermal deformation compensation (FANUC)	
Coolant supply system	Tank: 750 L, Pump motor: 250 W		
Coolant nozzle	3 flexible nozzles		

Optional Specifications and Accessories

Specifications	Remarks	Specifications	Remarks
Spindle speed 6,000 min ⁻¹	No. 50 2-speed gear head spindle 22/18.5 kW	Raised machine	
		Workpiece washing gun	
Spindle speed 12,000 min ⁻¹	No. 50 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Air gun mount	
		Angle head preps	
Spindle speed 15,000 min ⁻¹	No. 40 integral motor/spindle 26/18.5 kW (OSP), 22/18.5 kW (FANUC)	Manual clamp fixture	
		Hydraulic and pneumatic fixtures	
ATC magazine	54 tools	Oil skimmer	Belt type
Chip air blower	Nozzle type	Mist collector	
Coolant pump	Pump motor : 550 W	Rotary table	NC, tilt, indexing
Coolant nozzle	Ring type	Sub table	2,200 × 1,050 × 100 mm
Semi-dry unit	Nozzle type, Thru-spindle type	Reference tool	
Coolant level sensor		Ring gauge	
Coolant temperature regulator		High column	+150 mm
Oil hole device	0.5 MPa, 1.5 MPa	Auto gauging, auto zero offset	Infrared communication type
Thru-spindle coolant	Okuma pull stud for 1.5 MPa, 1.5 MPa large capacity, and 7 MPa required.	Auto tool lenth compensation/auto tool breakage detection function	Touch type
Spindle nose constraint	BIG-PLUS® No. 50 12,000 min ⁻¹ No. 40 15,000 min ⁻¹	Pulse handle	3-axis mobile type
		AbsoScale detection (OSP)	X-Y-Z axis, X-Y axis
		Scale feedback (FANUC)	X-Y-Z axis, X-Y axis
		Status lamp	
In-machine chip discharge	Oil pan: Chip flush Table L/R: floor type	Foundation bolt	
Off-machine chip discharge	Hinge conveyor, scraper conveyor Scraper type (with drum filter) conveyor See recommended chip conveyor specifications, P31.	Parallel 2-pallet APC (X-axis travel 2,050 mm specifications only)	Forms set together with below options. High column 150 mm Pallet size 2,200 × 1,020 mm
			Tap pallet, T-slot pallet
Chip bucket	Tilt with/without (L-type, H-type)		

Maximum tool dimensions

Unit: mm (in)


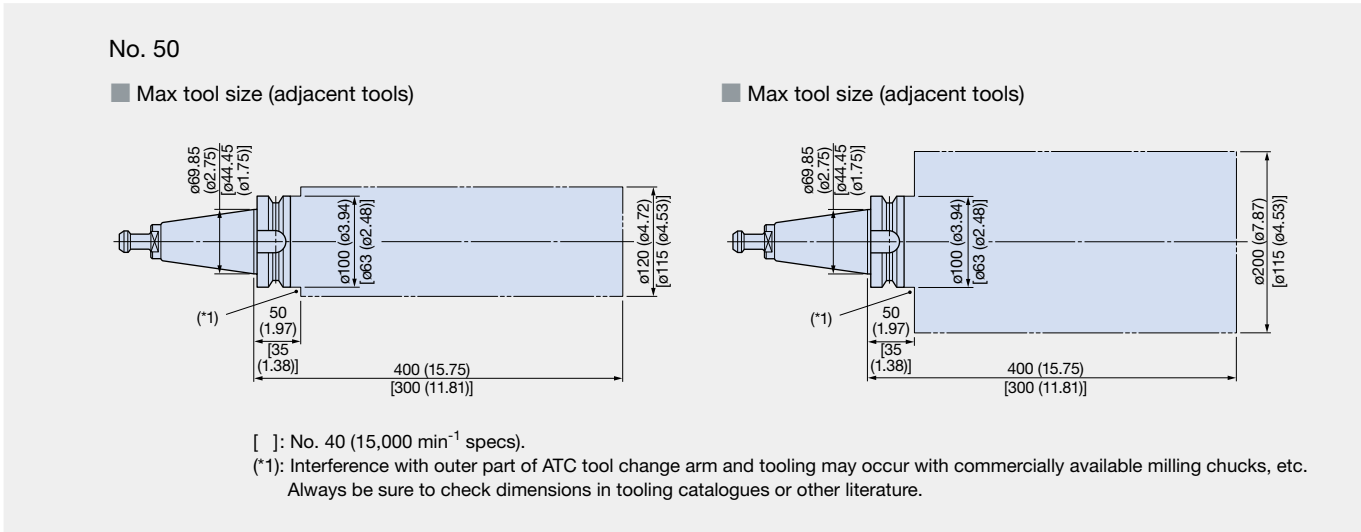



Table size

Unit: mm (in)

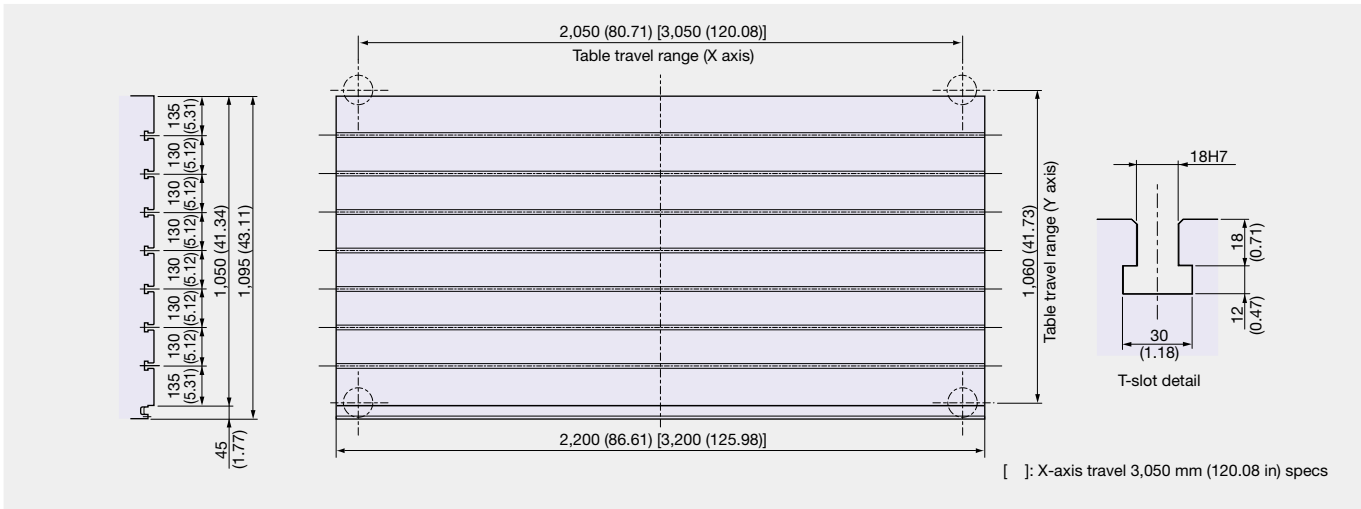

Working range

Unit: mm (in)

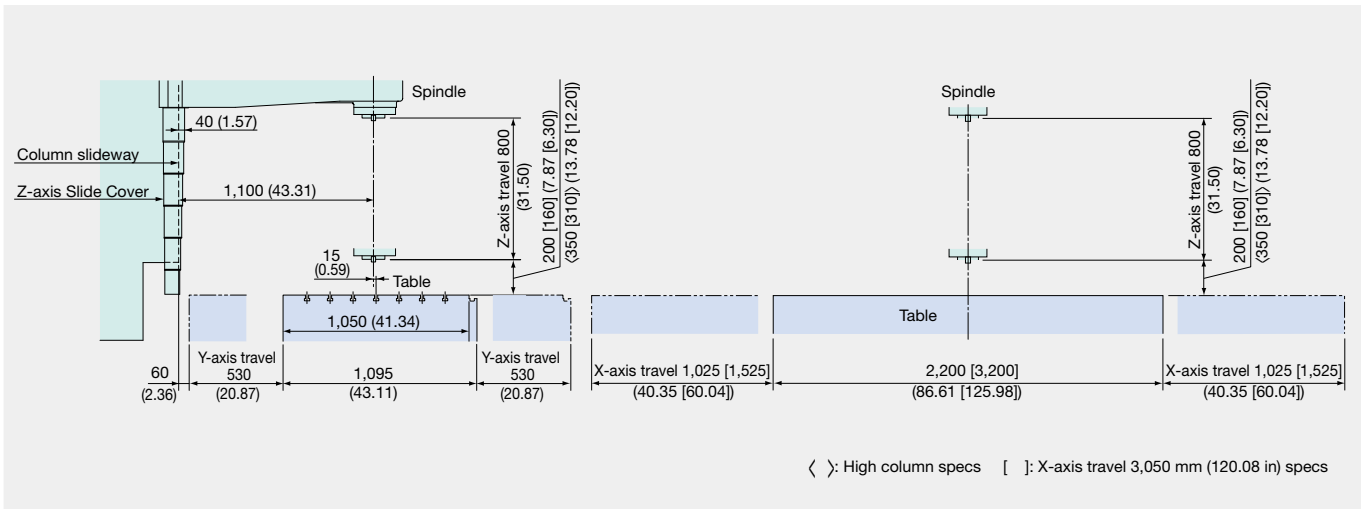





Smooth discharge of even large volumes of chips

Recommended Chip Conveyors (Please contact an Okuma sales representative for details.)

Workpiece material		Steel	FC	Aluminum / Nonferrous	Mixed (general use)
Chip shape					
In-machine	Coil	○	○	○	○
	Hinge	○	—	—	△ (*4)
	Scraper	—	○ (Dry)	—	—
	Scraper (with drum filter)	—	○ (Wet) with magnet	△ (*3)	—
Off-machine*	Hinge + scraper (with drum filter)	△ (*1)	△ (Wet) (*2)	○	○

*1. When there are many fine chips *2. When chips are longer than 100 mm *3. When chips are shorter than 100 mm *4. When there are few fine chips
Note: Fire prevention measures are necessary, as use of oil-based coolant may cause fire.
*With the MILLAC 1052VII, a hinge conveyor with drum filter is attached when discharging chips off-machine.

Off-machine lift-up chip conveyors

Type	Hinge	Scraper	Scraper (with drum filter)	Hinge + scraper (with drum filter)
Shape				

Note: Even if the conveyor has a drum filter, its coolant tank must be cleaned periodically.



In-machine chip discharge: Coil
MILLAC 468VII



In-machine chip discharge: Coil
MILLAC 611VII



Off-machine chip discharge:
Lift-up conveyor (Optional)
MILLAC 761VII


OSP suite OSP-P300MA
The Next-Generation Intelligent CNC

With revamped operation and responsiveness—
ease of use for machine shops first!

Smart factories implement advanced digitization and networking (IIoT) in manufacturing to achieve enhanced productivity and added value. The OSP has evolved tremendously as a CNC suited to advanced intelligent technology. Okuma’s new control uses the latest CPUs for a tremendous boost in operability, rendering performance, and processing speed. The OSP suite also features a full range of useful apps that could only come from a machine tool manufacturer, making smart manufacturing a reality.

Smooth, comfortable operation with the feeling
of using a smart phone

Improved rendering performance and use of a multi-touch panel achieve intuitive graphical operation. Moving, enlarging, reducing, and rotating 3D models, as well as list views of tool data, programs, and other information can be accomplished through smooth, speedy operations with the same feel as using a smart phone. The screen display layout on the operation screen can also be changed to suit operator preferences and customized for the novice and/or veteran machinists.

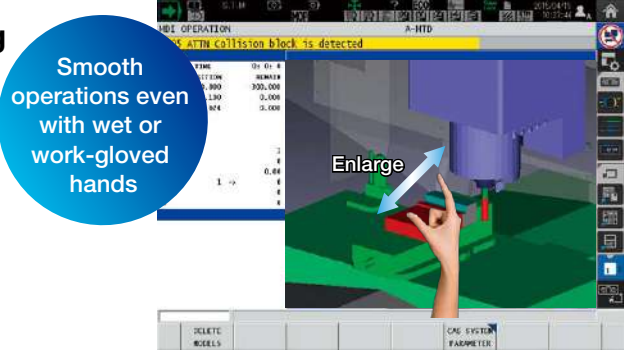

Note: Collision Avoidance System (Optional) shown above.


“Just what we wanted.”— Refreshed OSP suite apps

This became possible through the addition of Okuma’s machining expertise based on requests we heard from real, machine-shop customers. The brain power packed into the CNC, built by a machine tool manufacturer, will “empower shop floor” management.



Maintenance Monitor
Routine inspection support

The Maintenance Monitor displays items for inspections before starting daily operation and regular inspections and the rough estimate of inspection timing. Touching the [INFO] button displays the PDF instruction manual file of relevant maintenance items.

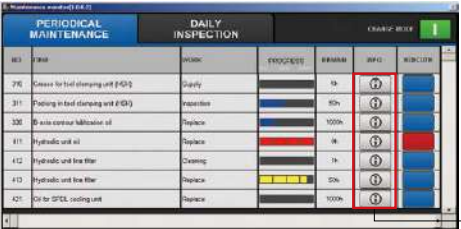

[INFO] button



Spindle Output Monitor
Increased productivity through visualization of motor power reserve



E-mail Notification
Monitoring operating status even when away from the machine



Common Variable Monitor
Comment display for greater ease of use and faster work




Screen Capture
Automatic saving of recorded alarms



Scheduled Program Editor
Easy programming without keying in code

Connect Plan Get Connected, Get Started, and Get Innovative with Okuma “Monozukuri”
Connect, Visualize, Improve

Okuma’s Connect Plan is a system that provides analytics for improved utilization by connecting machine tools and visual control of factory operation results and machining records. Simply connect the OSP and a PC and install Connect Plan on the PC to see the machine operation status from the shop floor, from an office, from anywhere. The Connect Plan is an ideal solution for customers trying to raise their machine utilization.

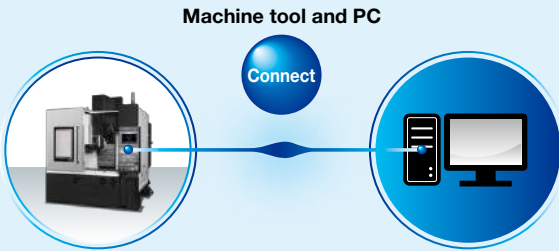

Okuma Control

OSP-P300MA

Standard Specifications

Basic specs	Control	X, Y, Z simultaneous 3-axis, spindle control (1 axis)
	Position feedback	OSP full range absolute position feedback (zero point return not required)
	Coordinate functions	Machine coordinate system (1 set), work coordinate system (20 sets)
	Min / Max command	±99999.999 mm, ±9999.9999°, 8-digit decimal, command unit: 0.001 mm, 0.01 mm, 1mm, 0.0001°, 0.001°, 1°
	Feed	Cutting feed override 0 to 200%, rapid traverse override 0 to 100%
	Spindle control	Direct spindle speed command, override 30 to 300%, multi-point indexing
	Tool compensation	No. of registered tools: Max 999 sets, tool length/radius compensation: 3 sets per tool
	Display	15-inch color LCD + multi-touch panel operations
	Self-diagnostics	Automatic diagnostics and display of program, operation, machine, and NC system faults
	Program capacity	Program storage capacity: 4 GB; operation backup capacity: 2 MB
Programming	Program operations	Program management, editing, scheduled program, fixed cycle, G-/M-code macros, arithmetic, logic statements, math functions, variables, branch commands, coordinate calculate, area machining, coordinate convert, programming help
Operations	"suite apps"	Applications to graphically visualize and digitize information needed on the shop floor
	"suite operation"	Highly reliable touch panel suited to shop floors. One-touch access to suite apps.
	Easy Operation	"Single-mode operation" to complete a series of operations. Advanced operation panel/graphics facilitate smooth machine control
	Machine operations	MDI, manual (rapid traverse, manual cutting feed, pulse handle), load meter, operation help, alarm help, sequence return, manual interrupt/auto return, pulse handle overlap, parameter I/O, PLC monitor, easy setting of cycle time reduction
	MacMan	Machining management: machining results, machine utilization, fault data compile & report, external output
Communications / Networking		USB (2 ports), Ethernet, DNC-T1
High speed/accuracy specs		Hi-cut Pro, pitch error compensaion, SERVONAVI, Machining Time Shortening Function TAS-S (Thermo Active Stabilizer—Spindle): MILLAC 611VⅡ , MILLAC 761VⅡ , MILLAC 852VⅡ , MILLAC 1052VⅡ TAS-C (Thermo Active Stabilizer—Construction): MILLAC 611VⅡ , MILLAC 761VⅡ , MILLAC 852VⅡ , MILLAC 1052VⅡ
Energy-saving	ECO suite	ECO Idling Stop*1, ECO Power Monitor*2

*1. Spindle cooler Idling Stop is used on TAS-S machines. *2. The power display shows estimated values. When precise electrical values are needed, select the wattmeter option.

Optional Specifications

Items		Kit specs		NML		3D		AOT	
		E	D	E	D	E	D	E	D
Interactive functions									
Advanced One-Touch IGF-M (w/Real 3D simulation)								●	●
Interactive MAP (I-MAP)					●		●		
Programming									
Auto scheduled program update		●	●	●	●	●	●	●	●
Common variables	1,000 pcs								
	(Std: 200 pcs)								
(Std: 200 pcs)									
2,000 pcs									
Program branch; 2 sets									
Program notes (MSG)				●			●		●
Coordinate system select	100 sets	●			●			●	
	200 sets			●			●		●
	(Std: 20 sets)								
400 sets									
Helical cutting (within 360°)		●	●	●	●	●	●	●	●
3D circular interpolation									
Synchronized TappingⅡ		●	●	●	●	●	●	●	●
Arbitrary angle chamfering		●	●	●	●	●	●	●	●
Cylindrical side facing									
Slope machining									
Tool maximum rotational speed setting									
F1-digit feed	4 sets, 8 sets, parameter								
Programmable travel limits (G22, G23)		●	●	●	●	●	●	●	●
Skip (G31)									
Additional G/M code macros									
3D tool compensation									
Tool wear compensation				●			●		●
Drawing conversion	Programmable mirror image (G62)			●			●		●
	Enlarge/reduce (G50, G51)			●			●		●
User task 2									
I/O variables (16 each)									
Inverse time feed									
Monitoring									
Real 3D simulation					●		●	●	●
Simple load monitor	Spindle overload monitor	●	●	●	●	●	●	●	●
NC operation monitor		●	●	●	●	●	●	●	●
Hour meters	Power, spindle, NC, cutting								
Work counter									
With M02 and M30 commands									
Cutting Status Monitor									
Machine Status Logger									
AI machine diagnostics									
spindle*2, feed axis									
MOP-TOOL									
Adaptive control, overload monitor									
Tool life management		●	●	●	●	●	●	●	●
Hour meter, No. of workpieces									

Note: NML: normal 3D: 3D simulation AOT: Advanced One-Touch IGF E: Economy D: Deluxe

*1. Harmonic Spindle Speed Control available only with Machining Navi M-i or M-gⅡ + specifications.

*2. Available when integral motor/spindles are used.
(Not available with MILLAC 468VⅡ No. 50 6,000 min⁻¹ and MILLAC 561VⅡ No. 40 12,000min⁻¹ spindles.)

*3. Machining Navi M-gⅡ is available with gear spindles.

FANUC 31i-B

Standard Specifications

Basic Specs	Control	Simultaneous X, Y, Z control, positioning, linear/circular interpolation
	Input increment	±999999.999 mm to 0.001 mm (±3937.0078 to 0.0001 in.), 0.001°
	Workpiece coordinates	G54 to G59 6 sets
	Feed	Direct F4 digit command, feed rate override 0 to 200%
	Spindle control	Direct S5 command, spindle override 50 to 150%
	Tool compensation	T4 digit command, tool compensation: 64 sets
	Display	10.4-inch LCD, English language display, graphic display
Programming	Program capacity	Program capacity 64 KB (160 m)
	Programming operations	63 registered programs, programmable data input
		Fixed cycle, tool length measurement
		Extended program editing, coordinate rotation, manual interaction Optional block skip (1)
Operations	Machine operations	Pulse handle, input/output interface, Self-diagnostics, alarm buzzer
Communications / Networking		USB (1 port), memory card interface, embedded Ethernet (FOCAS2/Ethernet)
High speed/accuracy specs		AI contour control I, bell-shaped acceleration/deceleration Spindle Thermal Growth Compensation: MILLAC 611VⅡ , MILLAC 761VⅡ , MILLAC 852VⅡ , MILLAC 1052VⅡ Construction Thermal Growth Compensation: MILLAC 611VⅡ , MILLAC 761VⅡ , MILLAC 852VⅡ , MILLAC 1052VⅡ
Energy-saving function		Idling stop

Optional Specifications

Kit specs		Soft-K	AI Contouring Control Ⅱ kit
Items			
Helical interpolation		●	●
Rigid tapping		●	●
Simultaneous editing of multiple programs (background)		●	●
Custom macros		●	●
Program memory capacity 512 KB (1,280 m)		●	●
Operating time/part No. display		●	●
Tool life management		●	●
Selection of five optional language		●	●
Inch/metric conversion		●	●
No. of tool compensations: 99 sets		●	●
Machining condition selecting function		●	●
Machining quality level adjustment			●
Tool compensation memory C			●
Jerk control			●
AI contour control Ⅱ			●
Data server (including hard set) (1 GB)			●
High speed processing			●
Nano smoothing			●
Smooth TCP			●
Data server explorer connection			●

Programming	
Program memory capacities	128 KB (320 m), 256 KB (640 m), 512 KB (1,280 m), 1 MB (2,560 m), 2 MB (5,120 m), 4 MB (10,240 m), 8 MB (20,480 m)
Registered programs	Extension 1 (125, 250, 500, 1,000) Extension 2 (2,000, 4,000)
Helical interpolation	
Simultaneous editing of multiple programs (background)	
Custom macros	
Addition of custom macro common variables	Total 600
Display of machine utilization time / No. of parts	
Tool life management	
Rigid tapping	
No. of read-ahead blocks extension	AI contour control Ⅱ kit 600 → 1000
Data server capacity (Complete hard set included)	1 GB, 4 GB
External M code	
F1-digit feed	9 sets (parameter)
Arbitrary angle chamfering corner R	
Programmable mirror image	
Addition of workpiece coordinate system	48 sets, 300 sets
Automatic corner override	
Scaling	
FS15 program format	
Nanosmoothing	
Cylindrical interpolation	
Polar coordinate interpolation	
Operations	
Program restart	
Fast skip	
Handle interruption	
Tool compensations	99 sets, 200 sets, 400 sets , 499 sets, 999 sets
Tool max rotational speed setting function	
Tool offset	
Tool compensation memory	C
Warming up function	
Monitoring	
Power shutoff	
Hour meters	Power ON, Spindle run-time, NC ON time, Machining
Communication function	
Communication function	FL-net, CC-Link, EtherNet/IP, PROFIBUS, PROFINET I/O
RS-232C interface	
High-speed / high accuracy	
Scale feedback	X-Y-Z axes
Spindle Thermal Growth Compensation	MILLAC 468VⅡ , MILLAC 561VⅡ
Construction Thermal Growth Compensation	MILLAC 468VⅡ , MILLAC 561VⅡ
Other	
CNC cabinet lamp	
Circuit breaker	
LCD CF card adapter	
Program protection key switch	

*4. There are limitations when Super-NURBS and Collision Avoidance System are used simultaneously.

⚠ Fire Safety Precautions

To protect your factory and equipment from fire and assure continued safe operation, observe the following fire safety precautions whenever you operate machinery.

Whenever possible, avoid the use of oil-based coolants for cutting operations.

Sparks caused by hot chips, tool friction, and grinding can cause fires.

Always observe the following safety measures to ensure safe operation when machining flammable materials or when performing dry machining.

1. Oil-based coolant

(1) Use nonflammable cutting fluid coolant.

(2) When the use of an oil-based coolant is unavoidable:

- **Before** you begin machining, check cutting tools to make sure of their service life and the condition of the tool edge, and choose cutting conditions that will not cause a fire.
- Periodically clean the coolant filter to maintain sufficient coolant discharge, and frequently verify that coolant is discharging normally.
- Take measures to control the outbreak of fire: Place a fire extinguisher near the machine, have an operator constantly monitor operation, and install an automatic fire extinguishing system.
- Do not place flammable materials near the machine.
- Do not allow chips to over accumulate.
- Periodically clean the inside of the machine and the area surrounding it.
- Check that the machine is operating normally.
- Never run the machine unattended.
- Since an automatic fire extinguishing system and other peripherals are needed for grinding operations, please let us know as soon as possible if you plan to perform such operations.

2. Precautions regarding machining of potentially flammable materials

Before machining any material designated by law as a flammable substance, e.g., plastic, rubber, wood, acquaint yourself with the special characteristics of the material in terms of fire prevention, and observe the precautions given in (2) above to ensure safe operation.

Example: When machining magnesium, there is a danger that magnesium chips and water-soluble coolants will react to produce hydrogen gas, resulting in an explosive fire if any chip should ignite.

3. Dry machining

Dry machining is a fire hazard because workpieces, tools, and chips are not cooled. To ensure safe operation, do not place any flammable objects near the machine and do not allow chips to over accumulate.

In addition, be sure to check cutting tools to make sure of their service life and the condition of the tool edge, and observe the precautions regarding oil-based coolants given in (2) above.



OKUMA Corporation

Oguchi-cho, Niwa-gun,
Aichi 480-0193, Japan
TEL: +81-587-95-7825 FAX: +81-587-95-6074