


HT1001P-2

Continuous Additive Manufacturing Solution

► www.farsoon.com

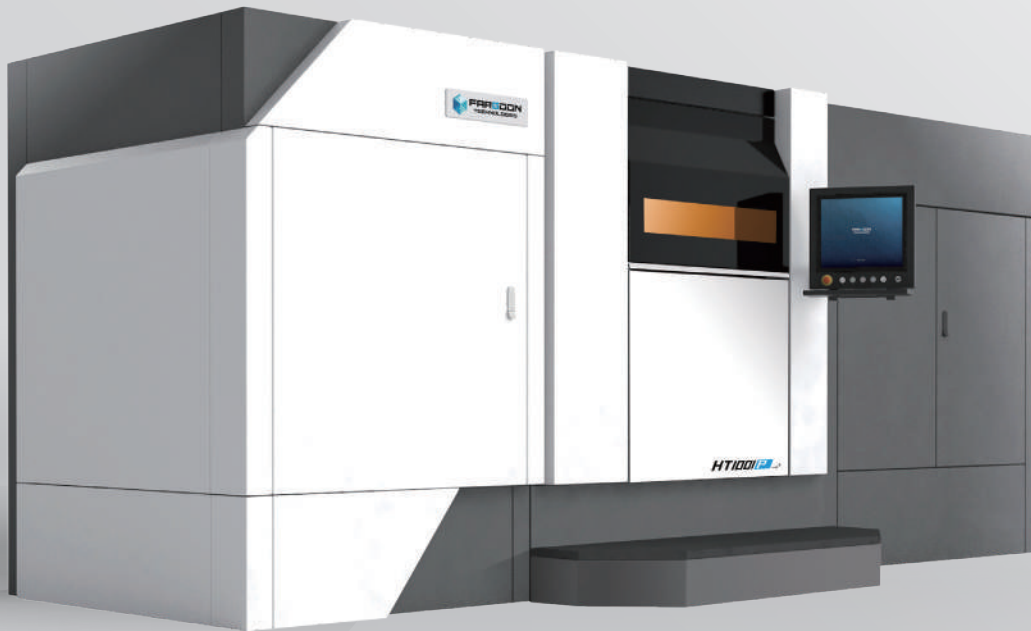

DESIGNED FOR PRODUCTION

The HT1001P-2 CAMS system was designed from the ground up with manufacturing in mind. With continuous batch production capability, the HT1001P-2 allows intensive manufacturing cycles with little down time between builds. The systems throughput is also enhanced with a high efficiency top-feed system as well as fully digital multi-laser scanning capability. The HT1001P-2 has also been designed with a comprehensive powder handling system featuring a closed loop powder system with increased automation and little need for operator interaction with the powder supply. With the HT1001P-2 the additive industry is ready to take the next steps towards true manufacturing.

ENHANCED CAPABILITIES

The HT1001P-2 offers production capabilities for its users beyond the current state of the art. The large 1000x500x450 build cylinder allows for unparalleled production of numerous small parts or that of large parts without the need for joining or gluing. The HT1001P-2 is also capable of a greater temperature range than current SLS systems with build chamber temperature capable of reaching 220°C allowing for the processing of high performance materials such as PA6 and PA12.

OPEN AND MODULAR

The HT1001P-2 like all Farsoon systems is fully open. This means that Farsoon machines like other truly industrial manufacturing systems have open parameters as well as an open material model. In addition, the HT1001P-2's modular design allows for the easy addition of future stations for pre and post processing as well as integration into existing production lines.



FARSOON HT1001P-2


TECHNICAL DATA		HT1001P-2
External Dimensions (L×W×H)	4290×2375×2185 mm (Full Module) (168.9×93.5×86.0 in), 2740×2375×2185 mm (Build Station only) (107.9×93.5×86.0 in)	
Build Cylinder Size ¹ (L×W×H)	1000×500×450 mm (39.4×19.7×17.7 in)	
Net Weight	Approx. 5000 KG (11023.1 lb) (Full Module) / 3500KG (7716.2 lb) (Build Station only)	
Laser Type	Dual CO ₂ laser, 2×100W	
Scanner	High-precision three-axis digital galvo system	
Layer Thickness	0.06~0.3 mm (0.0024-0.0118 in)	
Volume Build Rate ²	Up to 15 L/h	
Scanning Speed	Max. 15.2 m/s (49.9 ft/s)	
Max. Chamber Temperature	220°C (428°F)	
Thermal Field Control	Multi-zone heater & Intelligent temperature control systems	
Temperature Regulation	Continuous real-time build surface temperature monitoring & optimization	
Operating System	64 bit Windows 10	
Comprehensive Software	BuildStar, MakeStar®	
Data File Format	STL	
Key Software Features	Open machine key parameters, real-time build parameter modification, three-dimensional visualization, diagnostic functions	
Inert Gas Protection	Nitrogen	
Power Supply	EUR/China: 400V±10%, 3~/N/PE, 50/60Hz, 50A US: transformer sold with machine	
Operating Ambient Temperature	22-28°C (71.6-82.4°F)	
Materials ³	FS3300PA, FS3401GB, FS4100PA, FS3150CF, FS3250MF,FS6140GF, WANFAB-PU95AB, Ultrasint® TPU 88A black, FS1092A-TPU*, FS1088A-TPU*, Ultrasint® PA6*, Ultrasint® PP nat 01*, more materials to come	

1 The functional build volume depends on the parts/materials.

2 Volume build rate depends on the parts/materials.

3 The materials marked with * are in the build process development.

Many factors may affect the performance characteristics of products. We recommend that you make tests to determine the suitability of a product for your particular purpose prior to use. Farsoon makes no warranties of any type, express or implied, including but not limited to, the warranties of merchantability or fitness for a particular use. This also applies regarding the consideration of possible intellectual property rights as well as laws and regulations. Farsoon reserves the right to change the technical data without notice. Farsoon®, Buildstar®, Makestar® are registered trademarks of Farsoon Technologies. Last Change: 2023-09

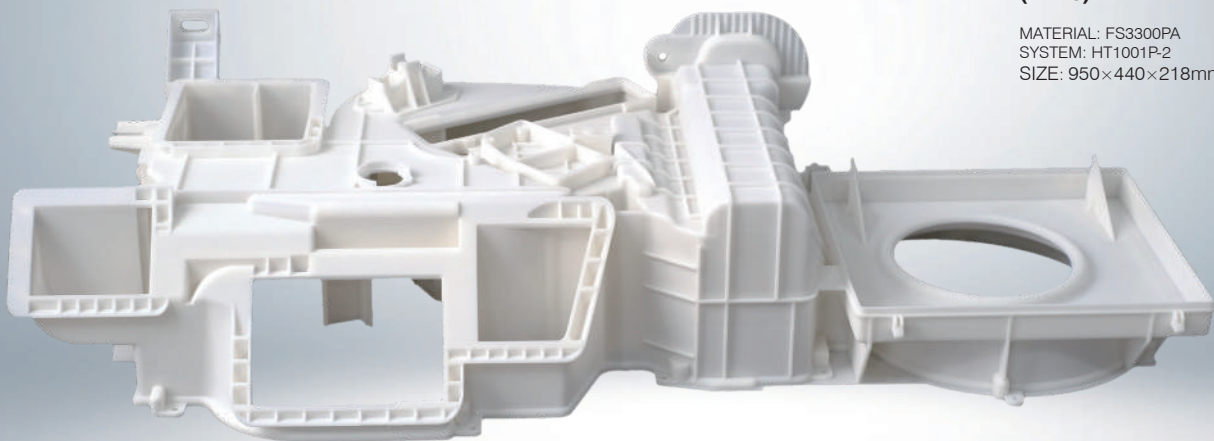

Heating Ventilating Air Conditioning (HVAC)

MATERIAL: FS3300PA
SYSTEM: HT1001P-2
SIZE: 950×440×218mm (37.4×17.3×8.6 in)

www.farsoon.com

AMEA Farsoon Technologies Co., Ltd. | +86.731.8397.6198 | globalinfo@farsoon.com | No. 181 Linyu Road, Changsha National High-Tech Industrial Zone, Hunan, China

AMERICAS Farsoon Americas CORP. | +1 512-551-9901 | contact@farsoonam.com | 3161 Eagles Nest Street, Suite 350, Round Rock, TX 78665

EUROPE Farsoon Europe GmbH | +49 711 13796 0 | wehelpyou@farsoon-eu.com | Liebknechtstrasse 33, 70565 Stuttgart, Germany